


Catalog 120
CG, CH, CHR Switches
10 A-25 A

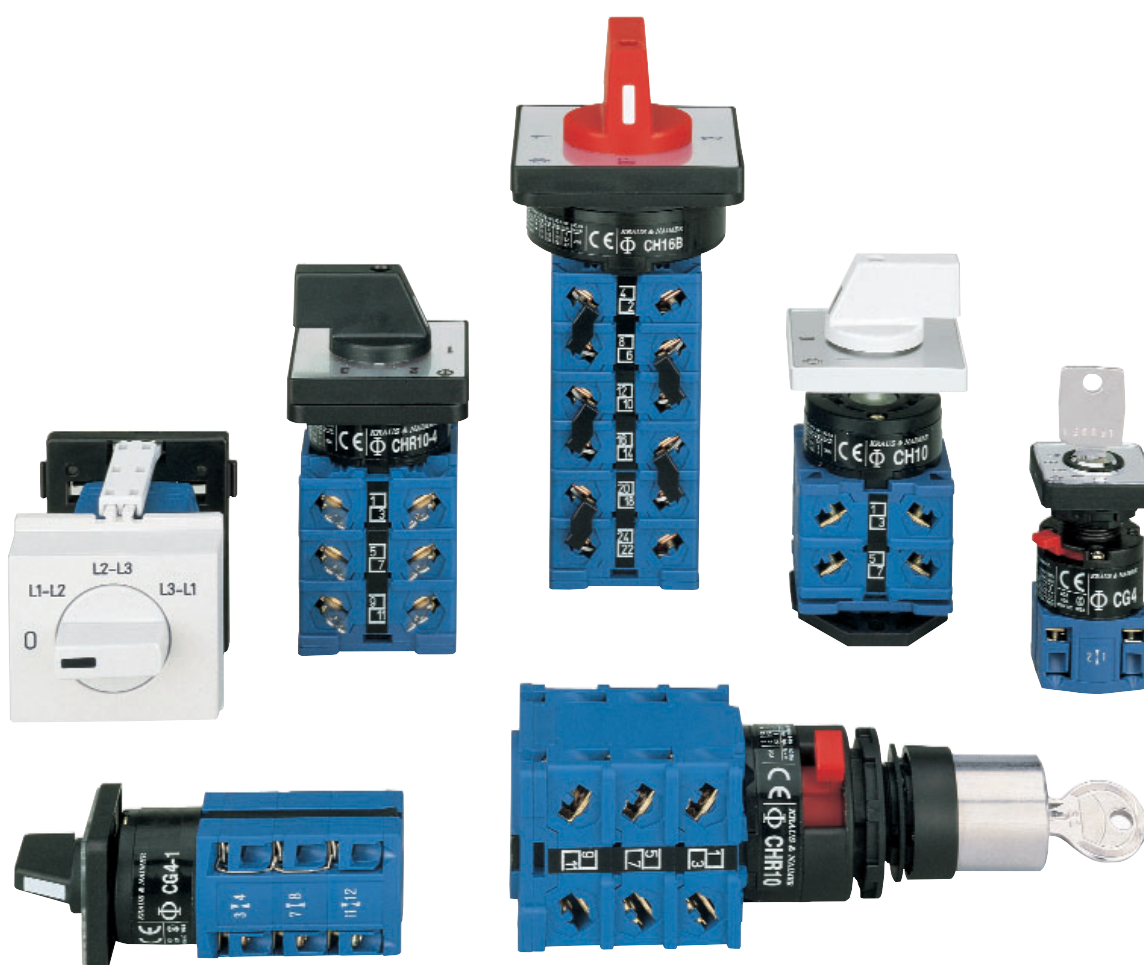

KRAUS & NAIMER

The development of the Blue Line rotary switch, contactor and motor starter product ranges is based on more than seventy-five years experience by Kraus & Naimer in the design and manufacture of electrical switchgear. Kraus & Naimer pioneered the introduction of the cam operated rotary switch and continues to be recognized as the world leader in that product field.

BLUE LINE

Blue Line products are protected by numerous patents throughout the industrial world. They are built to national and international standards and designed to withstand adverse temperatures and climates.

Blue Line products are accepted and universally recognized for their quality and workmanship. They are supported by a worldwide sales and service organization.

The Kraus & Naimer Registered Trademark



WORLDWIDE SYMBOL
FOR QUALITY SWITCHGEAR

Disconnectors and Main Switches acc. to IEC 60947-3 see Catalog 500

Contents	Page
Construction Data	2
Dimensions and Nominal Ratings	3
How to order	4, 5
Switch Function and Configuration	
ON/OFF Switches	6, 7
Double-throw Switches	8-10
General Application Switches	10
Coding Switches	11
Multi-step Switches	12-14
Voltmeter Switches	15-17
Ammeter Switches	17-19
Volt-ammeter Switches	19
Control Switches	19, 20
Motor Switches	21-23
Types of Mounting	
Panel Mounting	24-27
Base Mounting	28, 29
Escutcheon Plates	30, 31
Handles	32
International Standards and Approvals	33
Technical Data	34-36
Dimensions	
Panel Mounting	37-40
Base Mounting	41, 42
Overall Switch Lengths	42, 43
Blue Line Switchgear: Summary	44

Construction Data

Cam switches of the CG, CH and CHR-series are designed for universal application and may ideally be used for control switches, instrumentation switches and motor control switches. Different contact designs, contact materials and terminals allow the use as well as in electronic circuitry and in aggressive environments in accordance with IEC 60947-3, EN 60947-3, VDE 0660 part 107, UL and cUL (cUR).

The stage is the basis for all switches and can be supplied with a maximum of 2 contacts. All switches of this series are supplied with open terminals which are accessible while the switch is installed. The terminals are protected against accidental finger contact according to VDE 0106 part 100 (VBG 4). Captive plus-minus terminal screws and integrated screwdriver guides facilitate wiring. Due to the particular arrangement of the terminals of the CG switches, it is possible to install the


switches closely, side by side, or to mount them directly at the cable trays. The contact terminal numbers are easy to read, even if the switch is installed.

The captive plus-minus screws of the CH and CHR-series are located about 90° apart from the terminal direction. This allows for connecting wires without any interference with the terminal screws.

For connection with ring type terminals the CHR-series were designed. The switches are supplied with large open terminals. This allows for connection without removing the screws.


3 different Contact Systems are available

CG6 to
CHR16B




A rigid, double-break bridge with silver alloy contacts provides high making and breaking capabilities for regular control applications.

CG4 and
CG4-1




High contact reliability by multiple cross-point contacts, CG4 with 1 μ and CG4-1 with 35 μ gold plating.

CGD4-1



High contact reliability by H-bridge design with "cross-wire" contacts. The contact system with gold-plated contacts (CH12/CHR12 with silver contact) allows for low voltages, electronic compatible.

CH11/CHR11
CH12/CHR12




Type	Size	Possible Switching Angles	Max. No. of Stages
CG4-CGD4-1	S00	30°, 45°, 60°, 90°	8
CG6-CHR6	S00	30°, 45°, 60°, 90°	4
CG8-CHR16	S0	30°, 45°, 60°, 90°	12
CG8B, CG9B	S1	30°, 45°, 60°, 90°	12
CH10B-CHR16B	S1	30°, 45°, 60°, 90°	12
CG8S, CG9S	S0	60°	on request

CG-series




CH-series

CHR-series

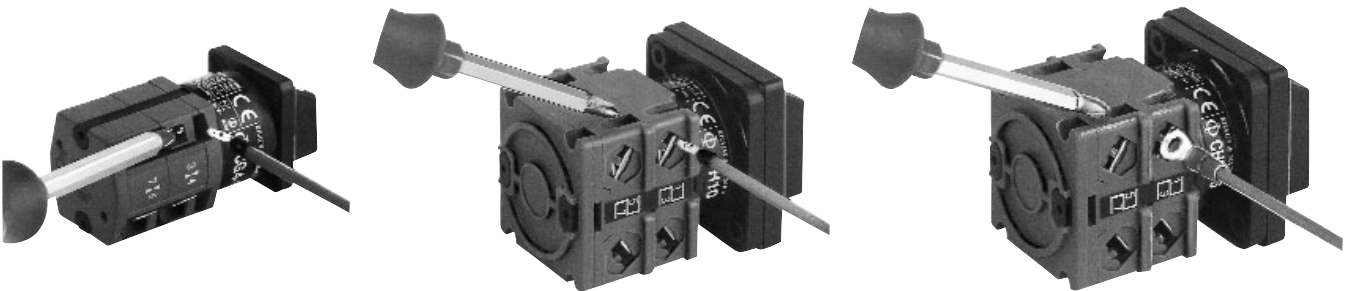

Above illustrates the standard terminal positions.

Nominal Ratings

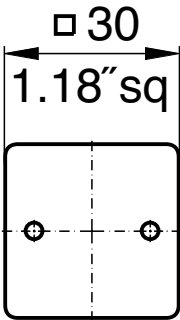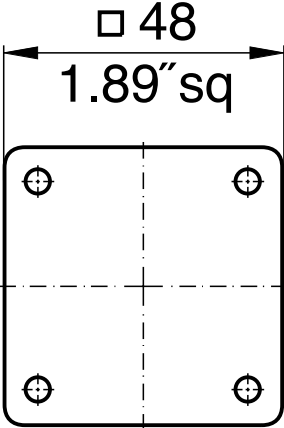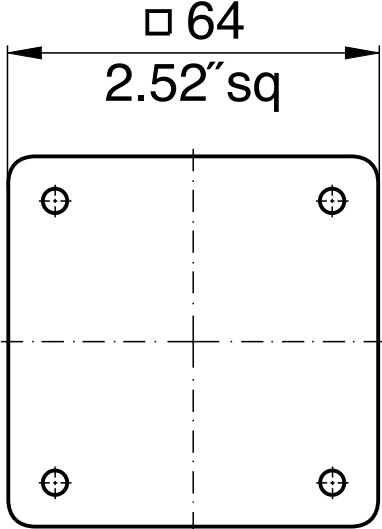Switch Size	Type	According to IEC 60947-3, EN 60947-3, VDE 0660 part 107			
		Operational Voltage ¹ U _e V	Thermal Current I _u /I _{th} A	Motor Rating 3 x 380 V-440 V AC-23A AC-3 kW kW	
S00 	CG4	440	10	3	2,2
	CG4-1	440	10	3	2,2
	CGD4-1	440	5	-	-
	CG6	690	20	7,5	5,5
	CG7	690	20	7,5	5,5
	CH6	690	20	7,5	5,5
	CHR6	690	20	7,5	5,5
S0 	CG8	690	20	7,5	5,5
	CG9	690	20	7,5	5,5
	CH10	690	20	7,5	5,5
	CH11	600	6	-	-
	CH12	600	6	-	-
	CH16	690	25	11	7,5
	CHR10	690	20	7,5	5,5
	CHR11	600	6	-	-
	CHR12	600	6	-	-
	CHR16	690	25	11	7,5
S1 	CH10B	690	20	7,5	5,5
	CH16B	690	25	11	7,5
	CHR10B	690	20	7,5	5,5
	CHR16B	690	25	11	7,5

For further technical details, refer to pages 34-36.

¹Valid for lines with grounded common neutral termination, overvoltage category III, pollution degree 3. Values for other supply systems on request.

How to order

Disconnectors and Main Switches according to IEC 60947-3 see Catalog 500

Three types of data (shown below) are required for ordering Blue Line cam-operated switches. Code numbers for ordering are shown in this catalog.

1. Type of Switch

The type of switch required may be easily selected by referring to the table on page 3 which shows the thermal current, power rating and dimensions of each switch. For further technical details, refer to pages 34-36. Variations of contacts and terminals are shown below.

2. Switch Function

The code numbers for standard switches shown on pages 6-23 indicate the switch function, escutcheon plate, handle and any optional extras.

Additional coding to modify type and color of handle and escutcheon plate is explained below.

3. Type of Mounting

Types of mounting are shown on pages 24-29. Catalog **101** describes enclosures and optional extras.

Specify the mounting code to indicate required mounting.

CH10

A202-600

VE

Type of Switch

Extending the switch type coding the following combinations will define:

Amendment	Definition	For switch types
-1	with gold contacts ¹	CH6, CHR6, CH10, CHR10, CH10B, CHR10B
-4	with quick connects (nickel-plated)	CH6, CH10, CH16, CH10B, CH16B
-6	with angled quick connects (nickel-plated)	CH6, CH10, CH16, CH10B, CH16B
B	S0 switches with latching mechanism size S1	CG8, CG9, CH10, CH16, CHR10, CHR16 for four hole panel mounting
L	with lockout-relay w/o manual release	CG8, CG9, CH10, CH16, CHR10, CHR16
M	with lockout-relay with manual release	CG8, CG9, CH10, CH16, CHR10, CHR16
X	with power failure release	CG8, CG9, CH10, CH16, CHR10, CHR16
R	with spring return latching mechanism	CG8, CH10, CH16
S	with snap action	CG8, CG9, CH10, CH16, CHR10, CHR16 with 60° switching

Example: Coding for switch type **CH10** with latching mechanism size S1 is **CH10B**.

Modification of Switches

The part number for switch function and options may be modified in cases where items are required other than standard. The modification may involve the escutcheon plate inscription, color combination of escutcheon plate and handle, type of escutcheon plate and handle or the optional extra.

Switch Size	Escutcheon Plate Frame	Handle	Escutcheon Plate Backing	Escutcheon Plate Lettering	Dash Number
S0, S1	electro-gray	electro-gray	brushed alu	black	-100
S0, S1	electro-gray	electro-gray	black	mat silver	-500
S00, S0, S1	black	black	brushed alu	black	-600
S00, S0, S1	black	black	black	mat silver	-700

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram
		CG4- CGD4-1	CG6- CHR6	CG8,CG9 CH10- CHR16	CH10B- CHR16B			

ON/OFF Switches with 60° Switching

1 pole 2 pole 3 pole 3 pole with red handle 3 pole with V850 padlock attachment						A200-600 A201-600 A202-600 A202-626 A202-627	1 1 2 2 2	<p>1-12 pole</p>	
4 pole 4 pole 1 pole preclose 6° ¹ 5 pole 6 pole 7 pole 8 pole 8 pole 2 pole preclose 6° ¹ 9 pole 10 pole 11 pole 12 pole						A200-620 A201-620 A202-620 A203-620 A653-620 A341-620 A342-620 A343-620 A344-620 A654-620 A345-620 A346-620 A347-620 A348-620	1 1 2 2 3 4 4 4 5 6 6		
1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° ¹ 5 pole 6 pole 7 pole 8 pole 8 pole 2 pole preclose 6° ¹ 9 pole 10 pole 11 pole 12 pole						A200-621 A201-621 A202-621 A203-621 A653-621 A341-621 A342-621	1 1 2 2 2 3 3		<p>4 pole 1 pole preclose 6°</p>
1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° ¹ 5 pole 6 pole						A200-622 A201-622 A202-622 A203-622 A653-622 A341-622 A342-622	1 1 2 2 2 3 3		<p>8 pole 2 pole preclose 6°</p>
1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° ¹ 5 pole 6 pole						A200-623 A201-623 A202-623 A203-623 A653-623 A341-623 A342-623	1 1 2 2 2 3 3		
1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° ¹ 5 pole 6 pole						A200-624 A201-624 A202-624 A203-624 A653-624 A341-624 A342-624	1 1 2 2 2 3 3		
1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° ¹ 5 pole 6 pole						A200-625 A201-625 A202-625 A203-625 A653-625 A341-625 A342-625	1 1 2 2 2 3 3		

¹For use in a three phase four-wire system with switched neutral.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

ON/OFF Switches with 90° Switching

1 pole contacts						A290-600	1	<p>1, 2, 3, 4, 5 and 6 pole</p>
2 pole preclose 30°						A291-600	1	
3 pole						A292-600	2	
4 pole						A324-600	2	
4 pole 1 pole preclose 60°						A293-600	2	
4 pole 3 pole preclose 30°						A327-600	2	
5 pole contacts						A325-600	3	<p>4 pole 1 pole preclose 60°</p>
6 pole preclose 30°						A326-600	3	
1 pole contacts						A290-620	1	<p>4 pole 1 pole preclose 60°</p>
2 pole preclose 30°						A291-620	1	
3 pole						A292-620	2	
4 pole						A324-620	2	
4 pole 1 pole preclose 60°						A293-620	2	
4 pole 3 pole preclose 30°						A327-620	2	
5 pole contacts						A325-620	3	<p>4 pole 3 pole preclose 30°</p>
6 pole preclose 30°						A326-620	3	
3 pole 360° rotation	 					A208-600	2	
						A208-620	2	
3 pole for foot operation						A386-600	2	

ON/OFF Switches with 30° Switching

1 pole						A100-600	1	<p>1-4 pole</p>
2 pole						A101-600	1	
3 pole						A102-600	2	
4 pole						A103-600	2	
1 pole with spring return						A204-600	1	<p>1-4 pole</p>
2 pole with spring return						A205-600	1	
3 pole with spring return						A206-600	2	
4 pole with spring return						A207-600	2	
1 pole with spring return						A204-620	1	<p>1-4 pole</p>
2 pole with spring return						A205-620	1	
3 pole with spring return						A206-620	2	
4 pole with spring return						A207-620	2	

¹available as switch types CH16B and CHR16B

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CG8,CG9 CH10- CHR16	CH10B- CHR16B			

Double-throw Switches without „OFF“ 60° Switching

1 pole						A220-600	1	
2 pole						A221-600	2	
3 pole						A222-600	3	
4 pole						A223-600	4	
4 pole 1 pole preclose 6° ²						A673-600	4	
5 pole						A369-600	5	
6 pole						A370-600	6	
7 pole						A371-600	7	
8 pole						A372-600	8	
8 pole 2 pole preclose 6° ²						A972-600	8	
9 pole						A373-600	9	
10 pole						A374-600	10	
11 pole					A375-600	11		
12 pole					A376-600	12		

Double-throw Switches without „OFF“ with electrically isolated contacts

1 pole						A720-600	1	
2 pole						A721-600	2	
3 pole						A722-600	3	
4 pole						A723-600	4	
4 pole 1 pole preclose 6° ²						A973-600	4	
1 pole with spring return						A795-600	1	1 pole with spring return

Double-throw Switches without „OFF“ 30° Switching

1 pole						A120-600	1	
2 pole						A121-600	2	
3 pole						A122-600	3	
4 pole						A123-600	4	
1 pole with spring return						A295-600	1	
2 pole with spring return						A296-600	2	
3 pole with spring return						A297-600	3	
1 pole with spring return						A295-620	1	
2 pole with spring return						A296-620	2	
3 pole with spring return						A297-620	3	

¹Connection diagrams for CHR switches on request. ²For use in a three phase four-wire system with switched neutral.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CG8,CG9 CH10- CHR16	CH10B- CHR16B			

Double-throw Switches with Center „OFF“ 60° Switching

1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° ² 5 pole 6 pole 7 pole 8 pole 8 pole 2 pole preclose 6° ²						A210-600 A211-600 A212-600 A213-600 A913-600 A361-600 A362-600 A363-600 A364-600 A664-600	1 2 3 4 4 5 6 7 8 8	
1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° ² 5 pole 6 pole 7 pole 8 pole 8 pole 2 pole preclose 6° ²						A210-620 A211-620 A212-620 A213-620 A913-620 A361-620 A362-620 A363-620 A364-620 A664-620	1 2 3 4 4 5 6 7 8 8	
1 pole 2 pole 3 pole						A210-621 A211-621 A212-621	1 2 3	
1 pole 2 pole 3 pole						A210-622 A211-622 A212-622	1 2 3	
1 pole 2 pole 3 pole						A210-623 A211-623 A212-623	1 2 3	
1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° ²						A210-624 A211-624 A212-624 A213-624 A913-624	1 2 3 4 4	

Double-throw Switches with Center „OFF“ 90° Switching

1 pole 2 pole 3 pole 4 pole 1 pole preclose 6°						A218-600 A219-600 A299-600 A294-600	1 2 3 4	
1 pole 2 pole 3 pole 4 pole 1 pole preclose 6°						A218-620 A219-620 A299-620 A294-620	1 2 3 4	

Double-throw Switches with Center „OFF“ and electrically isolated contacts

1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° ²						A710-600 A711-600 A712-600 A713-600 A963-600	1 2 3 4 4	
1 pole with spring return 2 pole to center						A714-600 A715-600	1 2	

¹Connection diagrams for CHR switches on request. ²For use in a three phase four-wire system with switched neutral.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Double-throw Switches with Spring Return to Center

1 pole with spring return to center 2 pole 3 pole						A214-600	1	<p>1-3 pole</p>
						A215-600	2	
						A216-600	3	
1 pole 2 pole 3 pole						A214-620	1	
						A215-620	2	
						A216-620	3	
1 pole with spring return from left to center 2 pole 3 pole						A320-600	1	<p>1-3 pole</p>
						A321-600	2	
						A322-600	3	
1 pole 2 pole 3 pole						A320-621	1	
						A321-621	2	
						A322-621	3	

General Application Switches

1 pole 2 Gang 2 pole Switching sequence: 0, A, A+B 3 pole						A310-600	1	<p>1 pole 2 pole</p>	
						A312-600	2		
						A314-600	3		
1 pole 2 pole 3 pole						A310-620	1		<p>3 pole</p>
						A312-620	2		
						A314-620	3		
1 pole 3 Gang 2 pole Switching sequence: 0, A, A+B, A+B+C 3 pole						A311-600	2	<p>1 pole 2 pole</p>	
						A313-600	3		
						A315-600	5		
1 pole 2 pole 3 pole						A311-620	2		<p>3 pole</p>
						A313-620	3		
						A315-620	5		
1 pole 2 Gang 2 pole Series switching 3 pole Switching sequence: 0, A, B, A+B						A330-600	1	<p>1 pole 2 pole</p>	
						A331-600	2		
						A332-600	3		
1 pole 2 pole 3 pole						A330-620	1		<p>3 pole</p>
						A331-620	2		
						A332-620	3		
2 pole 2 Gang Series-parallel Switching						A339-600	2		
						A339-620	2		

¹Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram
		CG4- CGD4-1	CG6- CHR6	CH11 CH12	CH10B- CHR16B			

Coding Switches/Binary Code

0 - 7 360° rotation					A540-600	2	
0 - 7 complement 360° rotation					A541-600	2	
0 - 7 + complement 360° rotation					A542-600	3	
0 - 9					A550-600	2	
0 - 9 complement					A551-600	2	
0 - 9 + complement					A552-600	4	
0 - 11 360° rotation					A543-600	2	
0 - 11 + complement 360° rotation					A545-600	4	

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CG8,CG9 CH10- CHR16	CH10B- CHR16B			

Multi-step Switches without „OFF“

1 pole 3 Step 2 pole 3 pole 4 pole 5 pole 6 pole						A230-600 A250-600 A270-600 A476-600 A484-600 A489-600	2 3 5 6 8 9	
1 pole 4 Step 2 pole 3 pole 4 pole 5 pole 6 pole						A231-600 A251-600 A271-600 A477-600 A485-600 A490-600	2 4 6 8 10 12	
1 pole 5 Step 2 pole 3 pole 4 pole						A232-600 A252-600 A272-600 A478-600	3 5 8 10	
1 pole 6 Step 2 pole 3 pole						A233-600 A253-600 A273-600	3 6 9	
1 pole 7 Step 2 pole 3 pole						A234-600 A254-600 A274-600	4 7 11	
1 pole 8 Step 2 pole 3 pole						A235-600 A255-600 A275-600	4 8 12	
1 pole 9 Step						A236-600	5	
1 pole 10 Step						A237-600	5	
1 pole 11 Step						A238-600	6	
1 pole 12 Step 1 pole 360° rotation						A239-600 A639-600	6 6	

¹Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CG8,CG9 CH10- CHR16	CH10B- CHR16B			

Multi-step Switches without „OFF“ with electrically isolated contacts

1 pole 3 Step						A730-600	2	 1 pole
2 pole						A750-600	3	 2 pole
1 pole 4 Step						A731-600	2	 1 pole
2 pole						A751-600	4	 2 pole

Multi-step Switches with „OFF“

1 pole 2 Step						A240-600	1	 1-6 pole
2 pole						A260-600	2	
3 pole						A280-600	3	
4 pole						A480-600	4	
5 pole						A486-600	5	
6 pole						A491-600	6	
1 pole						A240-620	1	1-6 pole
2 pole						A260-620	2	
3 pole						A280-620	3	
4 pole						A480-620	4	
5 pole						A486-620	5	
6 pole						A491-620	6	
1 pole 3 Step						A241-600	2	 1 and 2 pole
2 pole						A261-600	3	
3 pole						A281-600	5	
4 pole						A481-600	6	
5 pole						A487-600	8	
1 pole							A241-620	
2 pole						A261-620	3	
3 pole						A281-620	5	
4 pole						A481-620	6	
5 pole						A487-620	8	
1 pole							A241-621	2
2 pole						A261-621	3	
								 5 pole

¹Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CG8,CG9 CH10- CHR16	CH10B- CHR16B			

Multi-step Switches with „OFF“

1 pole 4 Step 2 pole 3 pole 4 pole						A242-600 A262-600 A282-600 A482-600	2 4 6 8	
1 pole 4 Step 2 pole 3 pole 4 pole						A242-620 A262-620 A282-620 A482-620	2 4 6 8	1-4 pole
1 pole 5 Step 2 pole 3 pole						A243-600 A263-600 A283-600	3 5 8	
1 pole 5 Step 2 pole 3 pole						A243-620 A263-620 A283-620	3 5 8	1-3 pole
1 pole 6 Step 2 pole 3 pole						A244-600 A264-600 A284-600	3 6 9	
1 pole 6 Step 2 pole 3 pole						A244-620 A264-620 A284-620	3 6 9	1-3 pole
1 pole 7 Step 2 pole						A245-600 A265-600	4 7	
1 pole 7 Step 2 pole						A245-620 A265-620	4 7	1 pole 2 pole
1 pole 8 Step						A246-600	4	
1 pole 8 Step						A246-620	4	
1 pole 9 Step						A247-600	5	
1 pole 9 Step						A247-620	5	
1 pole 10 Step						A248-600	5	
1 pole 10 Step						A248-620	5	
1 pole 11 Step 1 pole 360° rotation						A249-600 A649-600	6 6	
1 pole 11 Step 1 pole 360° rotation						A249-620 A649-620	6 6	

¹Connection diagrams for CHR switches on request.

Switch Function and Configuration

CG, CH, CHR Switches

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CG8,CG9 CH10- CHR16	CH10B- CHR16B			

Voltmeter Switches without „OFF“

3 phase 3 wire						A023-600	2	
						A023-620	2	
3 phase 3 wire 3 phase to phase and phase to neutral						A025-600	3	
						A025-620	3	

Voltmeter Switches with „OFF“

2 pole 360° rotation						A002-600	1	
3 phase 3 wire						A004-600	2	
						A004-620	2	
						A004-621	2	
						A004-622	2	
						A004-623	2	
						A004-624	2	
						A011-600	2	

¹Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CG8,CG9 CH10- CHR16	CH10B- CHR16B			

Voltmeter Switches with „OFF“

3 phase to neutral						A005-600	2	
						A005-620	2	
						A005-621	2	
						A005-622	2	
						A005-623	2	
3 phase to phase and 3 phase to neutral						A007-600	3	
						A007-620	3	
						A007-621	3	
						A007-622	3	
						A007-623	3	
						A007-624	3	
2 separate 3 phase with center „OFF“						A008-600	4	
						A008-620	4	
						A008-621	4	
						A008-622	4	

¹Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CG8,CG9 CH10- CHR16	CH10B- CHR16B			

Voltmeter Switches with „OFF“

3 phase and 1 phase to neutral						A010-600	3	
						A010-620	3	
						A010-621	3	
						A010-622	3	

Ammeter Switches

Single pole with one current transformer						A046-600	1	
						A046-620	1	
						A046-621	1	
Single pole with 3 current transformers without „OFF“						A017-600	3	
						A017-620	3	
Single pole with 3 current transformers with „OFF“ 360° rotation						A048-600	3	
						A048-620	3	
						A048-621	3	
						A048-622	3	
						A048-623	3	

¹Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle CG4- CG6- CH10- CH10B- CGD4-1 CHR6 CHR16 CHR16B	Code	Stages	Connection Diagram ¹
----------	----------------	--	------	--------	---------------------------------

Ammeter Switches

Single pole with 2 current transformers (3 readings)						A021-600	2	
						A021-620	2	
Single pole with 4 current transformers						A036-600	4	
						A036-620	4	
2 pole 2 current transformers						A037-600	3	
						A037-620	3	
						A037-621	3	
2 pole 3 current transformers						A019-600	5	
						A019-620	5	
						A019-621	5	
2 pole						A038-600	5	
						A038-620	5	
						A038-621	5	
2 pole 4 current transformers						A039-600	6	
						A039-620	6	

¹Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Volt-ammeter Switches

3 phase - phase to phase 3 current					A027-600	6	
					A028-600	7	
3 phase voltage 3 phase current 4 wire					A033-600	5	
3 phase voltage 3 phase current 3 wire					A035-600	5	

Control Switches

Stop switch					A174-600	1	
Start switch					A175-600	1	
Stop start switch single pole					A176-600	1	
Stop start switch 2 pole					A183-600	2	
Stop start switch with spring return from start to run					A178-600	1	
					A178-620	1	
Stop start switch with spring return to run for 2 units					A177-600	2	
					A177-620	2	

¹Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Control Switches

Stop start switch with spring return to run with contactor interlock contactors for 2 units						A182-600	2	
						A182-620	2	
Motor voltage control switch						A150-600	2	

Control Switches with electrically isolated contacts

Stop start switch 1 pole						A789-600	1	
Stop start switch with spring return to 1						A791-600	1	
Stop start switch with spring return to run for 2 units						A790-600	2	
Contactor control with spring return to „OFF“						A179-600	2	
						A179-620	2	
Circuit breaker control						A537-600	2	

Control and Alarm Switches¹

With slip clutch and without indicator device						A190-600	5 ²	
Without indicator device						A192-600	2	

¹Advise the indicator device, described in Catalog 101, page 7. ²incl. slip clutch

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Motor Reversing Switches

2 pole						A400-600	2	
						A400-620	2	
						A400-621	2	
3 pole						A401-600	3	
						A401-620	3	
						A401-621	3	
3 pole with spring return to „OFF“						A228-600	3	
						A228-620	3	
3 pole for use with reversing contactors						A402-600	4	

Motor Control Switches

2 speed 2 winding 0-A-BY or Δ						A451-600	3	
						A451-620	3	
3 speed 2 winding 0-AΔ-BY-AΥ						A457-600	6	
						A457-620	6	

¹Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CG8,CG9 CH10- CHR16	CH10B- CHR16B			

Motor Control Switches

2 speed single winding						A440-600	4	
						A440-620	4	
2 speed single winding without „OFF“						A466-600	4	
2 speed single winding with center „OFF“						A441-600	4	
						A441-620	4	
2 speed single winding reversing						A442-600	6	
						A442-620	6	
2 speed single winding for use with contactors						A444-600	5	
						A444-620	5	
2 speed reversing for 2 way operation with slip clutch for „OFF“ load use						A468-600	10 ²	
						A468-620	10 ²	

¹Connection diagrams for CHR switches on request. ²incl. slip clutch

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Star-delta Switches




OFF-star-delta						A410-600	4	
						A410-620	4	
Reversing						A413-600	5	
With auxiliary contact closed in „OFF“ position						A416-600	5	
For use with reversing contactors						A419-600	4	

Start and Run Switches




Split-phase start						A425-600	2	
						A425-620	2	
Split-phase start reversing						A426-600	3	
						A426-620	3	
Split-phase reversing auto cutout of start field winding						A622-600	3	

¹Connection diagrams for CHR switches on request.







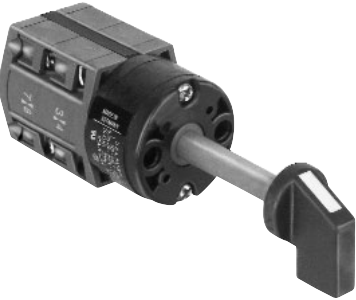

Two or Four Hole Panel Mounting	Terminals rotated 90°	Code	CG4-CHR6	CG8-CHR16	CH10B-CHR16B
--	-----------------------	-------------	----------	-----------	--------------

	<p>Panel mounting</p> <p>Two hole panel mounting</p> <p>Two hole panel mounting, protection IP 65</p>	<p>●</p> <p>●</p>	<p>E E-V</p> <p>EF EF-V</p>	<p>●</p> <p>●</p> <p>●</p> <p>●</p>		
	<p>Four hole panel mounting</p> <p>Four hole panel mounting, protection IP 65</p> <p>Two hole panel mounting, protection IP 65</p>	<p>●</p> <p>●</p> <p>●</p>	<p>E E-V</p> <p>EF EF-V</p> <p>E22 E22-V</p>	<p>●</p> <p>●</p> <p>●</p> <p>●</p>	<p>●</p> <p>●</p> <p>●</p>	<p>●</p> <p>●</p> <p>●</p>
	<p>Panel mounting using larger escutcheon plate and handle and with heavy duty latching</p> <p>Four hole panel mounting</p> <p>Four hole panel mounting, protection IP 65</p>		<p>EG</p> <p>EGF</p>	<p>●</p> <p>●</p>		






Two Hole Panel Mounting or Mosaic Mounting	Code	CG4-CHR6
--	------	----------

	<p>Panel mounting with round shaft for combining with commercial radio knobs</p> <p>Two hole panel mounting Shaft diam. 6 mm/.24 inch</p> <p>Two hole panel mounting Shaft diam. 6,35 mm/.25 inch</p>	E9	●
	Mosaic mounting	E91	●
	<p>For Siemens-Mosaic 30 mm grid depth</p>	E92	●
	<p>For Subklew-, Kreutzenbeck-, Symo-Mosaic 28 mm 25 mm 25 mm grid depth</p> <p>For Mauell-Mosaic 30 mm grid depth</p>	E93	●
		E94	●




Two or Four Hole Panel Mounting	Code	CG8-CHR16	CH10B-CHR16B
--	-------------	-----------	--------------

	<p>Panel mounting with heavy duty latching and metal shaft</p> <p>Four hole panel mounting Mounting plate, escutcheon plate and handle of size S0</p>	KN2	●	
	<p>Four hole panel mounting Mounting plate, escutcheon plate and handle of size S1</p>	KN1	●	●
	<p>Four hole panel mounting Mounting plate, escutcheon plate and handle of size S1 and 6 mm square metal shaft</p>	KD1	●	●
	<p>Panel mounting with protective cover</p>			
	<p>Four hole panel mounting Protection front IP 40 rear IP 30</p>	EC	CH CHR	●
	<p>Four hole panel mounting with additional shaft seal Protection front IP 65 rear IP 30</p>	ED	CH CHR	●
	<p>Four hole panel mounting Protection front IP 40 rear IP 42</p>	EC1		●
	<p>Four hole panel mounting with additional shaft seal Protection front IP 65 rear IP 42</p>	ED1		●
	<p>Two hole panel mounting Protection front IP 65 rear IP 42</p>	ED22	●	

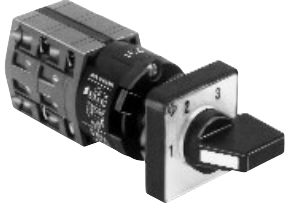



Single Hole Mounting	Terminals rotated 90°	Code	CG4-CHR6	CG8-CHR16
----------------------	-----------------------	------	----------	-----------

			mm	mm
 <p>With locking nut and shaft seal, protection IP 65</p> <p>Without escutcheon plate</p>	●	FS1 FS1-V	16/22 16/22	
 <p>With square escutcheon plate</p>	● ● ●	FT1 FT1-V FT3 FT3-V		22 22 22/30 22/30
 <p>With rectangular escutcheon plate</p>	●	FS2 FS2-V	16/22 16/22	
 <p>With size S1 escutcheon plate and heavy duty latching</p>	●	FT2 FT2-V FT4 FT4-V		22 22 22/30 22/30
 <p>Mounting key for locking nut</p>	●	FS4 FS4-V	16/22 16/22	22 22
		S00 T170 09		

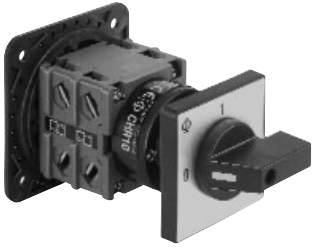
Base Mounting	Terminals rotated 90°	Code	CG4- CGD4-1	CG8- CHR16
---------------	-----------------------	------	----------------	---------------

	<p>Base mounting</p> <p>For four hole panel mounting</p> <p>For four hole base mounting and with integrated simplified door clutch, protection IP 65</p>	<p>●</p> <p>●</p>	<p>VE VE-V</p> <p>VF VF-V</p>	<p>●</p> <p>●</p>	<p>●</p> <p>●</p>
	<p>For two hole base mounting</p> <p>For two hole base mounting and with integrated simplified door clutch, protection IP 65</p>	<p>●</p> <p>●</p>	<p>VE22 VE22V</p> <p>VF22 VF22V</p>	<p>●</p> <p>●</p>	<p>●</p> <p>●</p>
	<p>Snap-on base mounting for track EN 50022.</p> <p>Snap-on base mounting for track EN 50022. Escutcheon plate fastened by screws.</p> <p>Snap-on base mounting for track EN 50022. Escutcheon plate fastened by single hole mounting e.g. for combining with a key-lock device.</p>	<p></p> <p></p> <p></p>	<p>VE1</p> <p>VE1E</p> <p>VE1F</p>	<p></p> <p>●</p> <p>●</p>	<p>●</p> <p>●</p> <p>●</p>

Base Mounting	Code	CG4- CGD4-1	CG8- CHR16
----------------------	-------------	----------------	---------------

Base mounting				
	<p>Snap-on base mounting for track EN 50022 with rectangular escutcheon plate for 45 mm standard knock-out.</p>	VE2		●
	<p>Snap-on base mounting for track EN 50022. Both the escutcheon plate for 45 mm standard knock-out and the handle are adjustable in height.</p>	VE21	●	●
	<p>Snap-on base mounting for track EN 50022 with circular escutcheon plate for 46 mm standard knock-out.</p>	VE3		●
	<p>Base mounting - four hole - for circular escutcheon plate with 46 mm knock-out.</p>	VE4		●

Escutcheon Plates

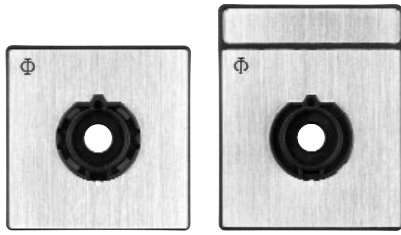

Square and rectangular escutcheon plates are available for each size of switch. The escutcheon plate consists of a frame and a faceplate having the switch positions which is then embossed with hot-foil backing. The escutcheon plate frame is an essential part of the switch and serves as a bearing surface for the handle. If the switch is to be mounted without an escutcheon plate we would recommend for size S1 the handle bearing plate T100-04.

Standard Letterings Available

(Over 500 standard letterings, special letterings upon request.)

30° switching

F022	F023	F137	F141	F142	F158	F159	F701	F703	F704	F026	F035	F152	F153	F169	F709	F024	F025
F034	F036	F037	F038	F039	F053	F139	F143	F144	F147	F149	F150	F151	F160	F161	F219	F221	F222
F224	F258	F259	F273	F280	F297	F298	F306	F307	F329	F384	F708	F001	F018	F019	F029	F030	F040
F052	F154	F155	F165	F166	F183	F184	F229	F301	F302	F321	F332	F333	F334	F335	F355	F374	F711
F712	F002	F021	F033	F041	F054	F055	F305	F319	F003	F042	F138	F255	F299	F308	F350	F351	F353
F004	F014	F017	F020	F027	F028	F031	F032	F043	F049	F135	F156	F157	F162	F167	F168	F187	F189
F303	F304	F336	F337	F347	F348	F710	F713	F714	F734	F005	F044	F136	F140	F702	F006	F010	F015
F045	F050	F007	F011	F046	F008	F012	F016	F047	F051	F009	F013	F048	F748				

45° switching

F215	F216	F295	F738	F742	F743	F744	F746	F747	F792	F793	F107	F109	F114	F115	F212	F213	F214
F217	F267	F289	F330	F375	F376	F383	F408	F409	F410	F411	F412	F413	F426	F427	F430	F729	F752
F775	F776	F777	F778	F779	F780	F781	F796	F797	F798	F105	F108	F112	F113	F117	F118	F293	F419
F429	F739	F741	F789	F790	F791	F794	F795	F106	F110	F116	F294	F317	F414	F415	F416	F417	F418
F782	F783	F784	F785	F786	F787	F788	F799	F111	F210	F211	F284	F285	F296	F322	F727	F740	

Escutcheon Plates

60° switching

F7070	F7072	F7087	F7088	F7089	F7133	F7163	F7164	F7192	F7193	F7196	F7197	F7198	F7230	F7231	F7232	F7234	F7243
F244	F247	F257	F262	F263	F264	F268	F282	F288	F470	F291	F310	F311	F313	F323	F328	F352	F367
F379	F380	F382	F705	F721	F722	F750	F754	F771	F773	F775	F776	F800	F801	F805	F806	F900	F901
F092	F093	F094	F098	F104	F194	F220	F223	F235	F237	F239	F240	F241	F249	F260	F269	F274	F281
F290	F292	F312	F314	F315	F316	F324	F331	F344	F354	F356	F357	F358	F359	F364	F370	F371	F373
F377	F381	F385	F469	F723	F732	F735	F777	F100	F101	F102	F309	F342	F343	F361	F362	F363	F365
F366	F074	F078	F082	F096	F097	F191	F195	F256	F325	F326	F720	F724	F079	F083	F084	F095	F099
F185	F190	F199	F233	F236	F238	F242	F283	F725	F730	F731	F736	F737					

90° switching

F056	F058	F063	F065	F068	F069	F134	F177	F178	F182	F201	F208	F251	F252	F253	F254	F340	F346
F360	F378	F456	F458	F700	F743	F057	F061	F064	F067	F171	F181	F205	F207	F209	F320	F349	F715
F719	F059	F060	F062	F066	F170	F172	F173	F174	F175	F176	F179	F180	F186	F188	F202	F204	F206
F250	F265	F266	F286	F318	F327	F338	F339	F425	F716	F717	F718	F726	F733	F751	F755	F756	F437


Miscellaneous


F119	F122	F125	F126	F129	F130	F225	F246	F248	F261	F341	F123	F127	F145	F146	F148	F245	F287
F345	F706	F707	F120	F121	F124	F128	F131	F132	F749							F990	F991
F801	F802	F803	F804	F805	F806	F807	F808	F809	F810	F811	F812	F813	F814	F815	F816	F817	F818
F819	F820	F821	F822	F823	F824	F825	F826	F827	F828	F829	F830	F831	F832	F833	F834	F835	

Handles

Type	Color	Code	Size		
			S00	S0	S1


Type	Color	Code	Size		
			S00	S0	S1

<p>R-Handle</p> 	black	G001	—	●	●
	red	G002	—	●	●
	white	G003	—	●	●
	electro-gray	G007	—	●	●

<p>I-Handle</p> 	black	G251	●	●	●
	red	G252	●	●	●
	white	G253	●	●	●
	electro-gray	G257	●	●	●

<p>F-Handle</p> 	black	G221	●	●	●
	red	G222	●	●	●
	white	G223	●	●	●
	electro-gray	G227	●	●	●

<p>B-Handle</p> 	black	G521	—	●	●
	red	G522	—	●	●
	white	G523	—	●	●
	electro-gray	G527	—	●	●

<p>S-Handle</p> 	black	G301	—	●	●
	red	G302	—	●	●
	white	G303	—	●	●
	electro-gray	G307	—	●	●
















<p>L-Handle</p> 	black	G501	—	—	●
	red	G502	—	—	●
	white	G503	—	—	●
	electro-gray	G507	—	—	●

<p>P-Handle</p> 	black	G211	—	●	●
	red	G212	—	●	●
	white	G213	—	●	●
	electro-gray	G217	—	●	●

<p>K-Handle</p> 	black	G411	—	—	●
	red	G412	—	—	●
	white	G413	—	—	●
	electro-gray	G417	—	—	●

<p>O-Handle</p> 	black	G321	—	—	●
	red	G322	—	—	●
	white	G323	—	—	●
	electro-gray	G327	—	—	●

International Standards and Approvals

Country	Authority	Mark or Standard								CH6	CHR6		
			CG4	CG4-1	CG6	CG7	CG8	CG9	CH10	CH16	CHR10	CHR16	
			CGD4-1	CG6	CG7	CG8	CG9	CH11	CH12	CH16B	CHR11	CHR12	CHR16B
			CG4	CG4-1	CG6	CG7	CG8	CG9	CH10B	CH16B	CHR10B	CHR12	CHR16B
USA	Underwriters Laboratories	 ¹									●	●	
		 ² ₃	●	●	●	●	●	●	●	●	●		
Canada	Canadian Standards Association	 ⁶	●	CG4-1	●	●	●	●	●	●	●	●	●
		 ¹ c										●	●
		 ² ₃ c	●	●						●	●		
Switzerland	Schweizerischer Elektrotechnischer Verein		●	● +	●	●	●	●	+	+	+	+	+
Denmark	Danmarks Elektriske Materielkontrol		+	+	+	+	+	+	+	+	+	+	+
Norway	Norges Elektriske Materielkontrol		+	+	+	+	+	+	+	+	+	+	+
Sweden	Svenska Elektriska Materielkontrollanstalten		+	+	+	+	+	+	+	+	+	+	+
Finland	Sähkötar-kastuskeskus		+	+	+	+	+	+	+	+	+	+	+
Austria	Österreichischer Verband für Elektrotechnik		+	+	+	+	+	+	+	+	+	+	+
Federal Republic of Germany	Verband Deutscher Elektrotechniker	VDE 0660 ⁴	+	+	+	+	+	+	+	+	+	+	+
Great Britain	British Standards Institution	BS EN 60947 ⁴	+	+	+	+	+	+	+	+	+	+	+
International Electrical Commission (IEC) Recommendation		IEC 60947 ⁵	+	+	+	+	+	+	+	+	+	+	+
China	China Quality Certification Centre	 ⁷ GB14048.3	●	CG4-1					CH10 CH10B		CHR10 CHR10B		
Russian Federation	GOST	 ⁷ CH01	●	● +	●	●	●	●	●	●	+	+	+
Germanischer Lloyd			+	+	+	+	+	+	+	+	+	+	+
Lloyds Register of Shipping			+	+	+	+	+	+	+	+	+	+	+

● Switch approved

+ Switch conforms to requirements

¹Approved under the "Component Program" (UL-Recognized Industrial Component). File No. E35541, Category Control No. NLRV2 (U.S.) resp. NLRV8 (Canada).

²Approved under the "Listing Program". File No. E35541, Category Control No. NLRV (U.S.) resp. NLRV7 (Canada).

³Switch types CGD4-1, CH11, CH12, CHR11, CHR12 approved under the "Listing Program". File No. E60262, Category Control No. NRNT (U.S.) resp. NRNT7 (Canada).

⁴It is not required for Industrial Switchgear to bear a symbol but must conform to requirements. By stating the specific standard no. on the product the manufacturer declares that all requirements of the product standard are met.

⁵IEC does not operate an approval scheme.

⁶File No. 13002, Class No. 3211-05 resp. 4652-04.

⁷If this approval is required, please request when ordering.

Selection Data	CG4	CG6	CG7	CH6	CHR6		
	CG4-1	CG8	CG9	CH10 CH10B	CHR10 CHR10B	CH16 CH16B	CHR16 CHR16B

Rated Insulation Voltage U_e	IEC 60947-3, EN 60947-3 ¹ VDE 0660 part 107 ¹		V	440	690	690	690	690	690	690							
	SEV	max.	V	400	690	690	–	–	–	–							
	UL/Canada ²		V	300	300	600	600	600	600	600							
	CEE 24		V	380	380	380	–	–	–	–							
Rated Impulse Withstand Voltage U_{imp}¹			kV	4	6	6	6	6	6	6							
Rated Thermal Current I_U/I_{th}	IEC 60947-3, EN 60947-3 VDE 0660 part 107		A	10	20	20	20	20	25	25							
	SEV	max.	A	10	20	20	–	–	–	–							
	UL/Canada		A	10	16	16	20	20	25	25							
Rated Operational Current I_e	AC-21A Switching of resistive loads, including moderate overloads	IEC 60947-3, EN 60947-3 VDE 0660 part 107	A	10	20	20	20	20	25	25							
	AC-1 Resistive or low inductive loads	SEV	400 V	A	10	–	–	–	–	–	–						
			500 V	A	–	–	–	–	–	–	–						
			600 V	A	–	–	–	–	–	–	–						
	AC-22A Switching of combined resistive or low inductive loads including moderate overloads	IEC 60947-3 VDE 0660, part 107	220 V-440 V	A	10	20	20	20	20	25	25						
			500 V	A	–	20	20	20	20	25	25						
			660 V-690 V	A	–	16	16	16	16	25	25						
	AC-15 Switching of control devices, contactors, valves etc.	IEC 60947-3 VDE 0660, part 107	110 V	A	2,5	6	6	5	5	8	8						
			220 V-240 V	A	2,5	5	5	5	5	8	8						
			380 V-440 V	A	1,5	4	4	4	4	5	5						
	Pilot Duty	UL/Canada ²	Heavy	VAC	300	300	600	600	600	600	600						
	Ampere Rating Resistive or low inductive loads	UL/Canada ²		A	10	16 (150 V) 10 (300 V)	16	20	20	25	25						
Resistive load/Motor load	CEE 24 ² NEMKO/FI ²		A	4/2	10/6	10/6	–	–	–	–							
			A	6/4 ⁴	10/6	–	–	–	–	–							
Short Circuit Protection	Max. fuse size	(gL-characteristic)	A	10	25	25	25	25	35	35							
	Rated short-time withstand current	(1s-current)	A	90	140	140	200	200	250	250							
DC Switching Capacity	No. of series contacts	Voltage V	1	2	3	4	5	6	8	Rated Operational Current I_e							
										CG4	CG6	CG7	CH6	CHR6			
	Resistive loads $T \leq 1$ ms	24	48	70	95	120	145	190	A	CG4-1	CG8	CG8S ³ CG9S ³	CH10 CH10B	CHR10 CHR10B	CH16 CH16B	CHR16 CHR16B	
		48	95	140	190	240	290	350	6	12	16	12	12	20	20		
		60	120	180	240	300	360	450	2,5	4,5	8	4,5	4,5	7,5	7,5		
		110	220	330	440	550	660	–	0,7	1	2	1	1	1,5	1,5		
		220	440	660	–	–	–	–	0,3	0,4	0,6	0,4	0,4	0,5	0,5		
		440	660	–	–	–	–	–	0,2	0,27	0,35	0,27	0,27	0,3	0,3		
		Inductive loads $T = 50$ ms	24	48	70	95	120	145	190	A	6	12	20	12	12	20	20
			30	60	90	120	150	180	240	3	5	13	5	5	9	9	
			48	95	140	190	240	290	350	1	2	6	2	2	3	3	
			60	120	180	240	300	360	450	0,7	1	3	1	1	1,5	1,5	
110	220		330	440	550	660	–	0,3	0,4	1	0,4	0,4	0,5	0,5			
Ambient Temperature of Stages⁵		open at 100 % I_U/I_{th} enclosed at 100 % I_{the}		55 °C during 24 hours with peaks up to 60 °C 35 °C during 24 hours with peaks up to 40 °C													

¹Valid for lines with grounded common neutral termination, overvoltage category III, pollution degree 3. Values for other supply systems on request.
²International Standards and Approvals, refer to page 33. ³Valid only for max. 4 simultaneously opening contacts. ⁴Valid for CG4 only. ⁵For electromagnetic optional extras see additional data in Catalog 101.

Selection Data	CG4	CG6	CG7	CH6	CHR6		
	CG4-1	CG8	CG9	CH10 CH10B	CHR10 CHR10B	CH16 CH16B	CHR16 CHR16B












Rated Utilization Category		IEC 60947-3, EN 60947-3 VDE 0660 part 107										
AC-2	Slip ring motor starting, reversing and plugging, star-delta starting (CG4-CHR10B)	3 phase	220 V-240 V	kW	2,5	4	4	4	4	5,5	5,5	
		3 pole	380 V-440 V		4,5	7,5	7,5	7,5	7,5	11	11	
			500 V		–	10	10	10	10	15	15	
			660 V-690 V		–	10	10	10	10	13	13	
AC-3	Direct-on-line starting, star-delta starting (CH16-CHR16B)	3 phase	220 V-240 V	kW	1,5	3	3	3	3	4	4	
		3 pole	380 V-440 V		2,2	5,5	5,5	5,5	5,5	7,5	7,5	
			500 V		–	5,5	5,5	5,5	5,5	7,5	7,5	
			660 V-690 V		–	5,5	5,5	5,5	5,5	7,5	7,5	
		1 phase	110 V-120 V	kW	0,3	0,6	0,6	0,6	0,6	1,5	1,5	
	2 pole	220 V-240 V	0,55		2,2	2,2	2,2	2,2	3	3		
		380 V-440 V	0,75		3	3	3	3	3,7	3,7		
		500 V	–		–	–	3	3	4	4		
	660 V-690 V	–	–	–	3	3	3,7	3,7				
AC-4	Direct-on-line starting, reversing, plugging and inching	3 phase	220 V-240 V	kW	0,37	0,55	0,55	0,55	0,55	1,5	1,5	
		3 pole	380 V-440 V		0,55	1,5	1,5	1,5	1,5	3	3	
			500 V		–	1,5	1,5	1,5	1,5	3	3	
		660 V-690 V	–	1,5	1,5	1,5	1,5	3	3			
		1 phase	110 V	kW	0,15	0,3	0,3	0,3	0,3	0,45	0,45	
	2 pole	220 V-240 V	0,25		0,75	0,75	0,75	0,75	1,1	1,1		
	380 V-440 V	0,5	1,5	1,5	1,5	1,5	2,2	2,2				
AC-23A	Frequent switching of motors or other high inductive loads	3 phase	220 V-240 V	kW	1,8	3,7	3,7	3,7	3,7	5,5	5,5	
		3 pole	380 V-440 V		3	7,5	7,5	7,5	7,5	11	11	
			500 V		–	7,5	7,5	7,5	7,5	11	11	
			660 V-690 V		–	7,5	7,5	7,5	7,5	11	11	
		1 phase	110 V-120 V	kW	0,37	0,75	0,75	0,75	0,75	1,5	1,5	
	2 pole	220 V-240 V	0,75		2,5	2,5	2,5	2,5	3	3		
		380 V-440 V	1,1		3,7	3,7	3,7	3,7	5,5	5,5		
		500 V	–		–	–	4	4	5,5	5,5		
	660 V-690 V	–	–	–	4	4	5,5	5,5				
Ratings	Standard motor load DOL-Rating (similar AC-3)	3 phase	110 V-120 V	HP	0,75	1,5	1,5	1,5	1,5	2	2	
		3 pole	220 V-240 V		1	1	3	3	3	5	5	
			440 V-600 V		–	–	5	5	5	10	10	
			1 phase	110 V-120 V	HP	0,33	0,5	0,5	0,5	0,5	1	1
		2 pole	220 V-240 V	0,75		1	1	1	1	2	2	
			277 V	0,75		1	2	2	2	3	3	
		440 V-600 V	–	–	2	2	2	5	5			
	Heavy motor load Reversing-Rating (similar AC-4)	3 phase	110 V-120 V	HP	–	0,5	0,5	0,5	0,5	1	1	
		3 pole	220 V-240 V		–	1	1	1	1	2	2	
			440 V-600 V		–	–	3	3	3	5	5	
			1 phase	110 V-120 V	HP	–	0,17	0,17	0,17	0,17	0,33	0,33
		2 pole	220 V-240 V	–		0,5	0,5	0,5	0,5	0,75	0,75	
		277 V	–	0,5		0,5	0,6	0,6	1	1		
	440 V-600 V	–	–	–	1,5	1,5	2	2				
Max. Permissible Wire Gage - Use copper wire only	Single-core or stranded wire	mm ²	2x1,5	2x2,5	2x2,5	2x4		2x4				
		AWG	2x14	2x12	2x12	2x10		2x10				
	Flexible wire (sleeving in accordance with DIN 46228) Flexible AWG wires (without sleeve)	mm ²	2x1,5(-)	2x2,5(2,5)	2x2,5(2,5)	2x2,5(2,5)		2x2,5(2,5)				
		AWG	2x16	2x14	2x14	2x12		2x12				
	Connection with insulated ring and fork type terminals	Internal diameter	mm					≥3,6	≥3,6			
		External diameter	mm					≤8,6	≤8,6			
Connection with quick connect terminations		mm					6,3	6,3				

Selection Data	CGD4-1	CH11	CHR11	CH12	CHR12
-----------------------	--------	------	-------	------	-------

Rated Insulation Voltage U_e	IEC 60947-3, EN 60947-3 ¹ VDE 0660 part 107 ¹	V	440	600	600	600	600
	North America	V	300	300	300	300	300
	min. voltage	V	on request				
Rated Impulse Withstand Voltage U_{imp}			on request				
Rated Thermal Current I_U/I_{th}	IEC 60947-3, EN 60947-3 VDE 0660 part 107	A	5	6	6	6	6
	North America	A	5	6	6	6	6
Rated Operational Current I_e AC-21A Switching of resistive loads, including moderate overloads	IEC 60947-3, EN 60947-3 VDE 0660 part 107						
	1 V/6 V	A	5/2	6/3	6/3	-/6	-/6
	North America ² 12 V/24 V	A	1,2/0,7	2/1	2/1	6/5	6/5
	48 V/60 V	A	0,45/-	0,8/0,7	0,8/0,7	4/3,5	4/3,5
	110 V	A	0,25	0,4	0,4	3	3
	240 V	A	0,15	0,2	0,2	1,8	1,8
	300 V	A	0,13	0,13	0,13	1,3	1,3
	440 V	A	0,1	0,1	0,1	1	1
	500 V	A	-	0,08	0,08	0,8	0,8
	600 V	A	-	0,05	0,05	0,5	0,5
Short Circuit Protection							
	Max. fuse size (glass-tube, quick) Rated short-time withstand current (1s-current)	A A	5 30	6 35	6 35	6 50	6 50
DC Switching Capacity DC-21B Resistive load $T \leq 1$ ms	IEC 60947-3, EN 60947-3 VDE 0660 part 107						
	1 V/6 V	A	3/1,2	4/2,5	4/2,5	-/4	-/4
	North America ² 12 V/24 V	A	0,7/0,4	1,5/0,8	1,5/0,8	3/2,2	3/2,2
	48 V/60 V	A	0,25/0,2	0,3/0,27	0,3/0,27	1,2/1	1,2/1
	110 V/240 V	A	0,13/0,08	0,2/0,1	0,2/0,1	0,6/0,3	0,6/0,3
	300 V/440 V 500 V/600 V	A A	0,07/0,05 -	0,07/0,05 0,03/0,02	0,07/0,05 0,03/0,02	0,2/0,15 0,1/0,1	0,2/0,15 0,1/0,1
Max. Permissible Wire Gage							
	Single-core or stranded wire	mm ² AWG	2x1,5 2x14	2x4 2x10		2x4 2x10	
	Flexible wire (sleeving in accordance with DIN 46228) Flexible AWG wires (without sleeve)	mm ² AWG	2x1,5(-) 2x16	2x2,5(2,5) 2x12		2x2,5(2,5) 2x12	
	Connection with insulated ring and fork type terminals						
	Internal diameter	mm			≥3,6		≥3,6
	External diameter	mm			≤8,6		≤8,6
Connection with quick connect terminations	mm			6,3		6,3	
Ambient Temperature of Stages³	open at 100 % I_U/I_{th} enclosed at 100 % I_{the}		55 °C during 24 hours with peaks up to 60 °C 35 °C during 24 hours with peaks up to 40 °C				

¹Valid for lines with grounded common neutral termination, overvoltage category III, pollution degree 3. Values for other supply systems on request.
²max. 300 V. ³For electromagnetic optional extras see additional data in Catalog 101.

Two or Four Hole Panel Mounting

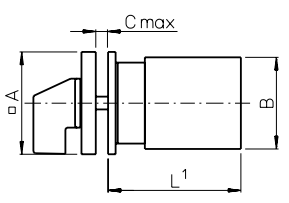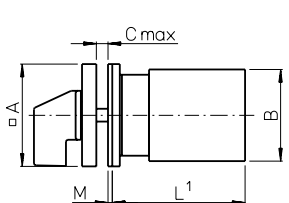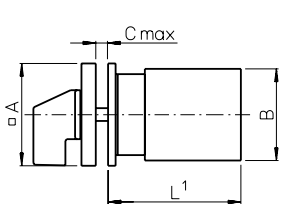 <p>E for CG4-CGD4-1 CH6/CHR6 E-V for CG6/CG7</p> <p>E-V for CG4-CGD4-1 CH6/CHR6 E for CG6/CG7</p>	 	<p>E E-V</p> 	<table border="1"> <thead> <tr> <th></th> <th>CG4 CG4-1 CGD4-1</th> <th>CG6 CG7</th> <th>CG8 CG9</th> <th>CH6 CHR6</th> <th>CH10- CHR16</th> <th>CH10B- CHR16B</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>30 1.18</td> <td>30 1.18</td> <td>48 1.89</td> <td>30 1.18</td> <td>48 1.89</td> <td>64 2.52</td> </tr> <tr> <td>B</td> <td>28 1.10</td> <td>38 1.50</td> <td>38 1.50</td> <td>46 1.81</td> <td>46 1.81</td> <td>56 2.20</td> </tr> <tr> <td>C</td> <td>4 .16</td> <td>4 .16</td> <td>4 .16</td> <td>4 .16</td> <td>4 .16</td> <td>4 .16</td> </tr> <tr> <td>D1</td> <td>3,2 .13</td> <td>3,2 .13</td> <td>5 .20</td> <td>3,2 .13</td> <td>5 .20</td> <td>5 .20</td> </tr> <tr> <td>D2</td> <td>8-11 .31-.43</td> <td>8-11 .31-.43</td> <td>8-15 .31-.59</td> <td>8-11 .31-.43</td> <td>8-15 .31-.59</td> <td>10-15 .39-.59</td> </tr> <tr> <td>E</td> <td>-</td> <td>-</td> <td>36 1.42</td> <td>-</td> <td>36 1.42</td> <td>48 1.89</td> </tr> </tbody> </table>		CG4 CG4-1 CGD4-1	CG6 CG7	CG8 CG9	CH6 CHR6	CH10- CHR16	CH10B- CHR16B	A	30 1.18	30 1.18	48 1.89	30 1.18	48 1.89	64 2.52	B	28 1.10	38 1.50	38 1.50	46 1.81	46 1.81	56 2.20	C	4 .16	4 .16	4 .16	4 .16	4 .16	4 .16	D1	3,2 .13	3,2 .13	5 .20	3,2 .13	5 .20	5 .20	D2	8-11 .31-.43	8-11 .31-.43	8-15 .31-.59	8-11 .31-.43	8-15 .31-.59	10-15 .39-.59	E	-	-	36 1.42	-	36 1.42	48 1.89							
	CG4 CG4-1 CGD4-1	CG6 CG7	CG8 CG9	CH6 CHR6	CH10- CHR16	CH10B- CHR16B																																																					
A	30 1.18	30 1.18	48 1.89	30 1.18	48 1.89	64 2.52																																																					
B	28 1.10	38 1.50	38 1.50	46 1.81	46 1.81	56 2.20																																																					
C	4 .16	4 .16	4 .16	4 .16	4 .16	4 .16																																																					
D1	3,2 .13	3,2 .13	5 .20	3,2 .13	5 .20	5 .20																																																					
D2	8-11 .31-.43	8-11 .31-.43	8-15 .31-.59	8-11 .31-.43	8-15 .31-.59	10-15 .39-.59																																																					
E	-	-	36 1.42	-	36 1.42	48 1.89																																																					
 <p>EF for CG4-CGD4-1 CH6/CHR6 EF-V for CG6/CG7</p> <p>EF-V for CG4-CGD4-1 CH6/CHR6 EF for CG6/CG7</p>	 	<p>EF EF-V</p> 	<table border="1"> <thead> <tr> <th></th> <th>CG4 CG4-1 CGD4-1</th> <th>CG6 CG7</th> <th>CG8 CG9</th> <th>CH6 CHR6</th> <th>CH10- CHR16</th> <th>CH10B- CHR16B</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>30 1.18</td> <td>30 1.18</td> <td>48 1.89</td> <td>30 1.18</td> <td>48 1.89</td> <td>64 2.52</td> </tr> <tr> <td>B</td> <td>28 1.10</td> <td>38 1.50</td> <td>38 1.50</td> <td>46 1.81</td> <td>46 1.81</td> <td>56 2.20</td> </tr> <tr> <td>C</td> <td>4 .16</td> <td>4 .16</td> <td>4 .16</td> <td>4 .16</td> <td>4 .16</td> <td>4 .16</td> </tr> <tr> <td>D1</td> <td>3,2 .13</td> <td>3,2 .13</td> <td>5 .20</td> <td>3,2 .13</td> <td>5 .20</td> <td>5 .20</td> </tr> <tr> <td>D2</td> <td>8-11 .31-.43</td> <td>8-11 .31-.43</td> <td>15-19 .59-.75</td> <td>8-11 .31-.43</td> <td>15-19 .59-.75</td> <td>19-22 .75-.87</td> </tr> <tr> <td>E</td> <td>-</td> <td>-</td> <td>36 1.42</td> <td>-</td> <td>36 1.42</td> <td>48 1.89</td> </tr> <tr> <td>M</td> <td>1 .04</td> <td>1 .04</td> <td>-</td> <td>1 .04</td> <td>-</td> <td>-</td> </tr> </tbody> </table>		CG4 CG4-1 CGD4-1	CG6 CG7	CG8 CG9	CH6 CHR6	CH10- CHR16	CH10B- CHR16B	A	30 1.18	30 1.18	48 1.89	30 1.18	48 1.89	64 2.52	B	28 1.10	38 1.50	38 1.50	46 1.81	46 1.81	56 2.20	C	4 .16	4 .16	4 .16	4 .16	4 .16	4 .16	D1	3,2 .13	3,2 .13	5 .20	3,2 .13	5 .20	5 .20	D2	8-11 .31-.43	8-11 .31-.43	15-19 .59-.75	8-11 .31-.43	15-19 .59-.75	19-22 .75-.87	E	-	-	36 1.42	-	36 1.42	48 1.89	M	1 .04	1 .04	-	1 .04	-	-
	CG4 CG4-1 CGD4-1	CG6 CG7	CG8 CG9	CH6 CHR6	CH10- CHR16	CH10B- CHR16B																																																					
A	30 1.18	30 1.18	48 1.89	30 1.18	48 1.89	64 2.52																																																					
B	28 1.10	38 1.50	38 1.50	46 1.81	46 1.81	56 2.20																																																					
C	4 .16	4 .16	4 .16	4 .16	4 .16	4 .16																																																					
D1	3,2 .13	3,2 .13	5 .20	3,2 .13	5 .20	5 .20																																																					
D2	8-11 .31-.43	8-11 .31-.43	15-19 .59-.75	8-11 .31-.43	15-19 .59-.75	19-22 .75-.87																																																					
E	-	-	36 1.42	-	36 1.42	48 1.89																																																					
M	1 .04	1 .04	-	1 .04	-	-																																																					
 <p>E22 for CG E22-V for CH/CHR</p> <p>E22-V for CG E22 for CH/CHR</p>	 	<table border="1"> <thead> <tr> <th></th> <th>CG8 CG9</th> <th>CH10- CHR16</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>48 1.89</td> <td>48 1.89</td> </tr> <tr> <td>B</td> <td>38 1.50</td> <td>46 1.81</td> </tr> <tr> <td>C</td> <td>4 .16</td> <td>4 .16</td> </tr> <tr> <td>D1</td> <td>5 .20</td> <td>5 .20</td> </tr> <tr> <td>E</td> <td>30 1.17</td> <td>30 1.17</td> </tr> </tbody> </table>		CG8 CG9	CH10- CHR16	A	48 1.89	48 1.89	B	38 1.50	46 1.81	C	4 .16	4 .16	D1	5 .20	5 .20	E	30 1.17	30 1.17																																							
	CG8 CG9	CH10- CHR16																																																									
A	48 1.89	48 1.89																																																									
B	38 1.50	46 1.81																																																									
C	4 .16	4 .16																																																									
D1	5 .20	5 .20																																																									
E	30 1.17	30 1.17																																																									

¹see page 43

Four Hole Panel Mounting or Mosaic Mounting

EG
EGF

	CG8 CG9	CH10- CHR16
A	64 2.52	64 2.52
B	38 1.50	46 1.81
C	4 .16	4 .16
D1	5 .20	5 .20
D2	10-15 .39-.59	10-15 .39-.59
E	48 1.89	48 1.89
M	6,7 .26	6,7 .26

EG **D2**
EGF **D2**

E9
E91

for
CG4-CGD4-1
CH6/CHR6

for
CG6/CG7


E92

	CG4 CG4-1 CGD4-1	CG6 CG7	CH6 CHR6
B	28 1.10	38 1.50	46 1.81


E93
E94

	CG4 CG4-1 CGD4-1	CG6 CG7	CH6 CHR6	E9	E91	E92	E93	E94
D	6 .24	6,35 .25	-	-	-	-	-	-
F	12 .47	12,8 .50	-	-	-	-	-	-
G	15,4 .61	17,4 .69	32,5 1,28	28,5 1,12	32,5 1,28	-	-	-
K	4,7 .19	5,5 .22	-	-	-	-	-	-
M	-	-	-	4 .16	-	-	-	-


Two or Four Hole Panel Mounting



**EC
ED
EC1
ED1**





ED22



	CG8	CG9	CH10- CHR16	CH10B- CHR16B		
			EC ED	EC ED	EC1 ED1	
	ED22	ED22	ED22	ED22	ED22	ED22
A	48 1.89	48 1.89	64 2.52	48 1.89	64 2.52	64 2.52
B	74 2.91	74 2.91	68 2.68	74 2.91	68 2.68	74 2.91
EC/EC1 C	-	-	4 .16	-	4 .16	4 .16
ED/ED1/ED22 C	4 .16	4 .16	2 .08	4 .16	4 .16	4 .16
D1	5 .20	5 .20	5 .20	5 .20	5 .20	5 .20
EC/EC1 D2	-	-	8-15 .31-.59	-	10-15 .39-.59	10-15 .39-.59
ED/ED1/ED22 D2	11-15 .43-.59	11-15 .43-.59	18-22 .71-.87	11-15 .43-.59	22-25 .87-.98	19-22 .75-.87
E	-	-	48 1.89	-	48 1.89	48 1.89
F	30 1.17	30 1.17	-	30 1.17	-	-
ED/ED1/ED22 M	1,5 .06	1,5 .06	2 .08	1,5 .06	2 .08	-
Stages L 1	74,3 2,93	74,3 2,93	-	74,3 2,93	-	72,7 2,86
2	74,3 2,93	74,3 2,93	-	74,3 2,93	-	72,7 2,86
3	94,3 3,71	94,3 3,71	-	94,3 3,71	-	92,7 3,65
4	94,3 3,71	94,3 3,71	103 4,06	94,3 3,71	103 4,06	-
5	94,3 3,71	-	-	-	114,5 4,51	-
6	-	-	-	-	127 5,00	-
7	-	-	-	-	152 5,98	-
8	-	-	-	-	164,5 6,48	-
9	-	-	-	-	177 6,97	-
10	-	-	-	-	-	-

Four Hole Panel Mounting or Single Hole Mounting

**KN1
KD1
KN2**







	KN2		KN1		
	CG8 CG9	CH10- CHR16	KD1 CG8 CG9	CH10- CHR16	CH10B- CHR16B
A	48 1.89	48 1.89	64 2.52	64 2.52	64 2.52
B	38 1.50	46 1.81	38 1.50	46 1.81	56 2.20
C	4 .16	4 .16	4 .16	4 .16	4 .16
D1	5 .20	5 .20	5 .20	5 .20	5 .20
D2	8-15 .31-.59	8-15 .31-.59	10-15 .39-.59	10-15 .39-.59	10-15 .39-.59
E	36 1.42	36 1.42	48 1.89	48 1.89	48 1.89
M	5,2 .20	5,2 .20	4,7 .19	4,7 .19	7 .28

**FS1...
FT1...
FT3...**

**FH3...
FS2...
FT2...
FT4...**






FS4...



**FS1...
FS2...
FS4...**

**FH3...
FT1...
FT2...**


**FT3...
FT4...**




	CG4		CG6		
	CG4-1 CGD4-1	CG7	CG8 CG9	CH6 CHR6	CH10- CHR16
A/E	30 1.18	30 1.18	48 1.89	30 1.18	48 1.89
FH3...	-	-	64 2.52	-	64 2.52
B	28 1.10	38 1.50	38 1.50	46 1.81	46 1.81
C	5 .20	5 .20	6 .24	5 .20	6 .24
D	29,5 1.16	29,5 1.16	39 1.54	29,5 1.16	39 1.54
F	39 1.54	39 1.54	-	39 1.54	-
M	12,5 .49	12,5 .49	20 .79	12,5 .49	20 .79
FH3...	-	-	27 1.07	-	27 1.07

Base Mounting


**VE
VE-V**

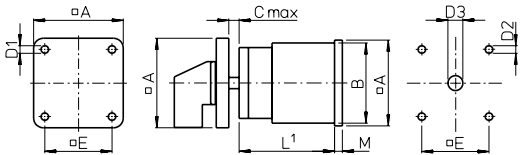


**VF
VF-V**

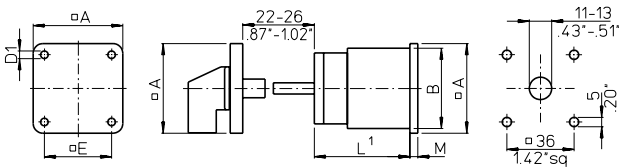

**VE22
VE22V**

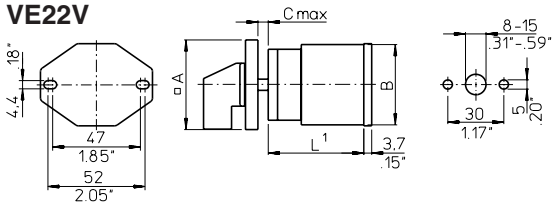

**VF22
VF22V**

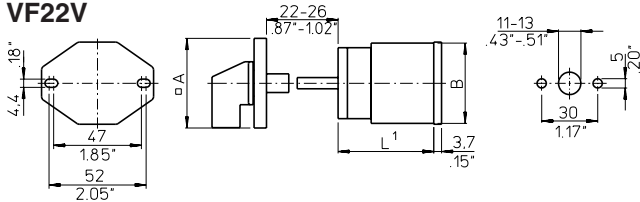


CG8 CH10-
CG9 CHR16


A²	48 1.89	48 (64) 1.89 (2.52)
B	38 1.50	46 1.81
C	10,5 .41	10,5 .41
D1	4,1 .16	4,1 .16
D2	5 .20	5 .20
D3	8-15 .31-.59	8-15 .31-.59
E²	36 1.42	36 (48) 1.42 (1.89)
M	2,2 .09	5,2 .20

²Dimensions in () for revertive mounting plate


VE1

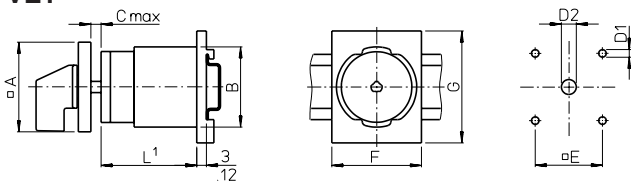

VE1E

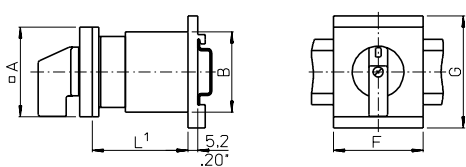

VE1F

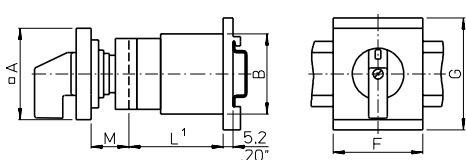


CG4
CG4-1 CG8 CH10-
CGD4-1 CG9 CHR16

A	30 1.18	48 1.89	48 1.89
B	28 1.10	38 1.50	46 1.81
C	-	10,5 .41	10,5 .41
D1	-	5 .20	5 .20
D2	-	8-15 .31-.59	8-15 .31-.59
E	-	36 1.42	36 1.42
F	35,5 1.40	48 1.89	48 1.89
G	60 2.36	60 2.36	60 2.36
M	12,5 .49	20 .79	20 .79


¹see page 43

Base Mounting and Escutcheon Plates


VE2

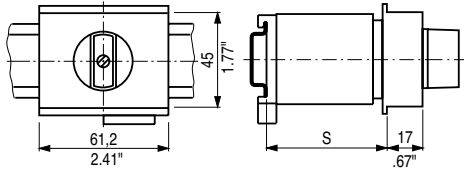


VE21
for CG4-CGD4-1

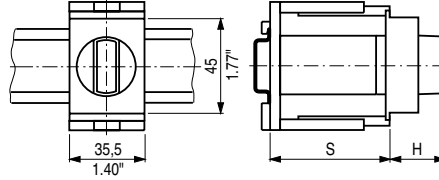


VE3

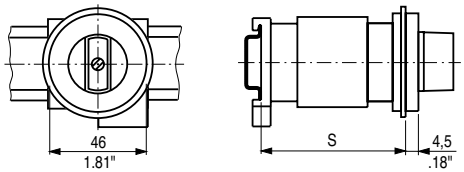

VE21
for CG8-CHR16

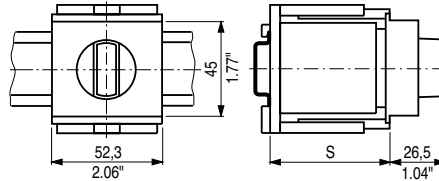


VE4

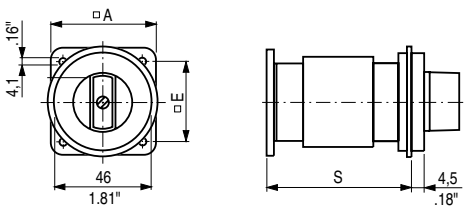

	VE2			VE3			VE4			S_{min.}	H	VE21			
	CG8	CG9	CH10-CHR16	CG8	CG9	CH10-CHR16	CG8	CG9	CH10-CHR16			CG4-CGD4-1	CG8	CG9	CH10-CHR16
	Max. no. of stages			Max. no. of stages			Max. no. of stages					No. of stages			
S = 46 1.81	1	1	1	-	-	-	1	-	-	44 1.73	21 .83	1	1	1	1
S = 50 1.97	2	1	2	1	-	1	1	1	-	46 1.81	26.5 1.04	2	2	-	-
S = 61 2.40	3	2	2	2	1	1	2	1	1	50 1.97	-	-	-	-	2
S = 67 2.64	3	2	3	2	2	2	2	2	2	54 2.13	-	-	-	2	-
S = 69 2.70	3	2	3	2	2	2	2	2	2	60 2.36	-	-	3	-	-
A							48 1.89	48 1.89	64 2.52	62 2.44	26.5 1.04	3	-	-	-
E							36 1.42	36 1.42	48 1.89	64 2.52	-	-	-	-	3
										72 2.83	-	-	4	3/4	-

Escutcheon plates for mounting E, EF, EG, EGF, KN1, KD1, KN2, EC, EC1, ED, ED1, VE, VE1, VF

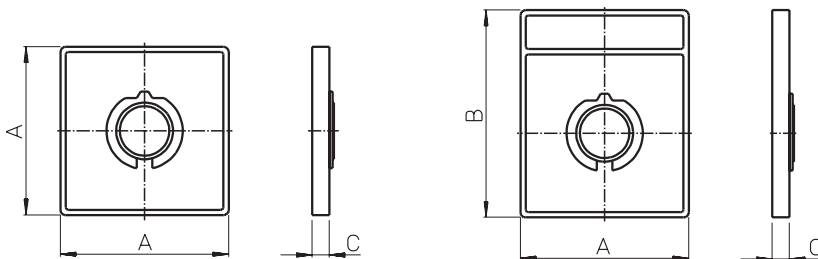


Size	A	B	C
S00	30 1.18	39 1.54	5.5 .22
S0	48 1.89	60 2.36	6.3 .25
S1	64 2.52	78.8 3.10	7.4 .29

Additional Lengths


Additional lengths for amendment (page 4)

	CG8 CG9	CH10 CH16	CHR10 CHR16
B	6,2 .24	6,2 .24	6,2 .24
S	14,3 .56	14,3 .56	14,3 .56
L, M	24,8 .98	24,8 .98	24,8 .98
X	23,3 .92	23,3 .92	23,3 .92

Quick connect terminations (plug 2,8 mm or 6,35 mm) for CH switches (page 4)



with quick connects



with angled quick connects

Length L

Stages	CG4		CG6	CG7	CG8	CG9	CH6 CHR6	CH10	CHR10	CH10B CHR10B	CHR16B CHR16B
	CG4-1 CGD4-1							CH11 CH12 CH16	CHR11 CHR12 CHR16		
1	38,5	43,2	47	40,7	44,5	46	43,5	43,5	48,9	48,9	
	1.52	1.70	1.85	1.60	1.75	1.81	1.71	1.71	1.93	1.93	
2	50,5	55,9	63,5	53,4	61	60	57,5	57,5	62,9	62,9	
	1.99	2.20	2.50	2.10	2.40	2.36	2.26	2.26	2.48	2.48	
3	62,5	68,6	80	66,1	77,5	74	71,5	71,5	76,9	76,9	
	2.46	2.70	3.15	2.60	3.05	2.91	2.81	2.81	3.03	3.03	
4	74,5	81,3	96,5	78,8	94	88	85,5	85,5	90,9	90,9	
	2.93	3.20	3.80	3.10	3.70	3.46	3.37	3.37	3.58	3.58	
5	86,5	-	-	91,5	110,5	-	99,5	99,5	104,9	104,9	
	3.41	-	-	3.60	4.35	-	3.92	3.92	4.13	4.13	
6	98,5	-	-	104,2	127	-	113,5	113,5	118,9	118,9	
	3.88	-	-	4.10	5.00	-	4.47	4.47	4.68	4.68	
7	110,5	-	-	116,9	143,5	-	127,5	127,5	132,9	132,9	
	4.35	-	-	4.60	5.65	-	5.02	5.02	5.23	5.23	
8	122,5	-	-	129,6	160	-	141,5	141,5	146,9	146,9	
	4.82	-	-	5.10	6.30	-	5.57	5.57	5.78	5.78	
9	-	-	-	142,3	176,5	-	155,5	155,5	160,9	160,9	
	-	-	-	5.60	6.95	-	6.12	6.12	6.34	6.34	
10	-	-	-	155	193	-	169,5	169,5	174,9	174,9	
	-	-	-	6.10	7.60	-	6.67	6.67	6.89	6.89	
11	-	-	-	167,7	209,5	-	183,5	183,5	188,9	188,9	
	-	-	-	6.60	8.25	-	7.22	7.22	7.44	7.44	
12	-	-	-	180,4	226	-	197,5	197,5	202,9	202,9	
	-	-	-	7.10	8.90	-	7.77	7.77	7.99	7.99	