

AUTOMOTIVE FUSES



AF

Automotive Fuse
Fast Acting


1A through 40A, 32VAC/DC - UL Listed
3A through 30A, 32VAC/DC - CSA Certified

Designed to U.L. Standard for Automotive Blade Type Fuses.
SAE (Society of Automotive Engineers) J1284.

Standard Fuse Ampere Ratings

| CATALOG NUMBER | AMPERE RATING | VOLTS | BODY COLOR |
|----------------|---------------|-------|------------|
| AF-1 | 1A | 32V | BLACK |
| AF-2 | 2A | 32V | GREY |
| AF-3 | 3A | 32V | VIOLET |
| AF-4 | 4A | 32V | PINK |
| AF-5 | 5A | 32V | TAN |
| AF-7-1/2 | 7-1/2A | 32V | BROWN |
| AF-10 | 10A | 32V | RED |
| AF-15 | 15A | 32V | BLUE |
| AF-20 | 20A | 32V | YELLOW |
| AF-25 | 25A | 32V | NATURAL |
| AF-30 | 30A | 32V | GREEN |
| AF-35 | 35A | 32V | BLUE GREEN |
| AF-40 | 40A | 32V | AMBER |

1. 250VAC @ 35A I.R./125VAC @ 10kA I.R.
2. 250VAC @ 100A I.R./125VAC @ 10kA I.R.
3. 125VAC @ 400A I.R.

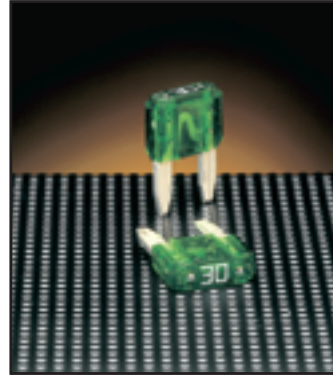


AF2

Automotive Fuse
Fast Acting
Plastic Body/Silver-Plated Terminals
2A through 30A, 32VDC - UL Listed

Designed to SAE (Society of Automotive Engineers) J2077.

Standard Fuse Ampere Ratings

| CATALOG NUMBER | AMPERE RATING | VOLTS | BODY COLOR |
|----------------|---------------|-------|------------|
| AF2-2 | 2A | 32V | GREY |
| AF2-3 | 3A | 32V | VIOLET |
| AF2-4 | 4A | 32V | PINK |
| AF2-5 | 5A | 32V | TAN |
| AF2-7-1/2 | 7-1/2A | 32V | BROWN |
| AF2-10 | 10A | 32V | RED |
| AF2-15 | 15A | 32V | BLUE |
| AF2-20 | 20A | 32V | YELLOW |
| AF2-25 | 25A | 32V | NATURAL |
| AF2-30 | 30A | 32V | GREEN |



AF3

Automotive Fuse
Time Delay
Plastic Body/Silver-Plated Terminals
UL Recognized 20-60A

Standard Fuse Ampere Ratings

| CATALOG NUMBER | AMPERE RATING | VOLTS | BODY COLOR |
|----------------|---------------|-------|------------|
| AF3-20 | 20A | 32V | YELLOW |
| AF3-30 | 30A | 32V | GREEN |
| AF3-40 | 40A | 32V | AMBER |
| AF3-50 | 50A | 32V | RED |
| AF3-60 | 60A | 32V | BLUE |
| AF3-70 | 70A | 32V | TAN |
| AF3-80 | 80A | 32V | NATURAL |

