

Catalog 302

Push Buttons and Pilot Lights, 22,5 mm Ø



KRAUS & NAIMER

The development of the Blue Line rotary switch, contactor and motor starter product ranges is based on more than seventy-five years experience by Kraus & Naimer in the design and manufacture of electrical switchgear. Kraus & Naimer pioneered the introduction of the cam operated rotary switch and continues to be recognized as the world leader in that product field.

BLUE LINE

Blue Line products are protected by numerous patents throughout the industrial world. They are built to national and international standards and designed to withstand adverse temperatures and climates.

Blue Line products are accepted and universally recognized for their quality and workmanship. They are supported by a worldwide sales and service organization.

The Kraus & Naimer Registered Trademark



WORLDWIDE SYMBOL
FOR QUALITY SWITCHGEAR

Contents	Page
Programs and Description	2, 3
Complete Standard Units	4, 5
Pre-assembled Front Elements	6, 7
Front Element Components	7, 8
Legend Plates	8, 9
Coupling Plate and Pilot Light Assemblies	9
Series Elements, Contact Blocks and Enclosures	10
Accessories	10-12
Front Plates for Push Buttons	13, 14
Front Plates for Mushroom Push Buttons	15
Color Caps for Pilot Lights	16
Design	17
Dimensions	18-21
Technical Data	22, 23
Blue Line Switchgear: Summary	24

Programs

Push Buttons and Pilot Lights, 22,5 mm Ø

Push buttons and pilot lights by Kraus & Naimer represent an ideal combination of functional security and economical efficiency in a modular design.

Push Buttons

- non-illuminated or illuminated
- flush, extended or with extended front ring
- momentary or latched (for converting into spring return function)

Pilot Lights

- Standard units flush or conical
- Solid pilot lights (direct wire)

Double-Push Buttons

- non-illuminated or illuminated

Emergency Stop Push Buttons

- fool-proof
- non-illuminated or illuminated
- without and with key
- optional mounting in enclosure

Potentiometer

- incl. resistor

Reset Push Buttons

- incl. reset rod

Rotary Switches

- non-illuminated or illuminated
- without and with key
- momentary (for converting into spring return function)

Cam Switches

- ON/OFF switches and double-throw switches
- protection IP 65
- for further cam switches, refer to Catalog 120

Enclosures

- plastic yellow or gray
- with 1, 2, 3, 4 or 6 positions

Legend Options

- front plates and color caps
- legend inserts

Accessories

- a wide range of accessories are available, e.g. protection shrouds and protection caps

Environmentally compatible Materials

- cadmium and asbestos-free
- recyclable

Selection

- complete units
- pre-assembled front elements
- individual components

Front Element



Legend Plate



Fixation Ring



Coupling Plate



Contact Blocks LED Pilot Light Assemblies



Front Elements

- ergonomical design, front rings metallic colored or black
- illuminated elements offer excellent brightest and contrast in all light conditions
- pilot lights with perfect light due to special lenses
- any inscription, abrasion-resistant by laser
- latched push buttons and rotary switches are convertible into spring return function
- mushroom push buttons with large points
- high protection and food resistance: push buttons and pilot lights IP 67/IP 69K, double-push buttons and rotary switches IP 66
- for special operating available with protection caps

Legend Plates

- for front elements and double-push buttons
- with legend inserts
- available with lasered or engraved inscription

Fixation Nut

- is part of the front element
- nut key for fixation nut as accessories

Coupling Plate

- for contact blocks and LED pilot light assemblies
- for max. 3 elements per contact level
- up to 6 contacts on 2 contact levels are possible

Contact Blocks and LED Pilot Light Assemblies

- finger-proof and open terminals (IP 20)
- captive mounting screws
- low overall depth, for mounting in commercial plaster depth box

Contact Blocks

- available as N/C and N/O
- high switching capacity, both in AC-15- and DC-13-operation (technical data see page 22)

LED Pilot Light Assemblies

- in green, red and white color
- long life (100 000 running hours) by especially low power consumption and vibration resistance
- with only 2 voltage ranges the worldwide common applications are covered
- for decoupled function control LED series elements are available

Program Completion

For extensive and complicated switching programs we recommend the use of cam switches size S00 described in Catalog 120. The design and appearance closely match the described push buttons and pilot lights.

Order Information

By changing the order text from P SN to P SB the unit will be specified with black front ring.


Description

Push Buttons and Pilot Lights, 22,5 mm Ø


The modular design of the series push buttons and pilot lights meets your personal requirements in every respect.

Front Elements

Push buttons non-illuminated

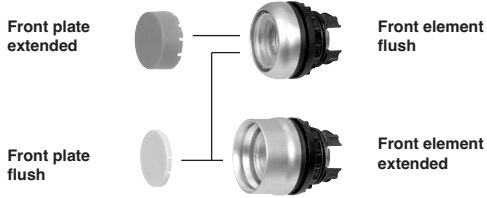

Push buttons illuminated

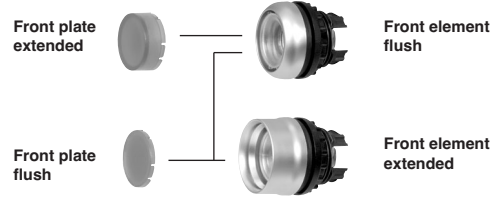

Mushroom push buttons



Rotary switches




Double-push buttons



Emergency stop push buttons



Pilot lights

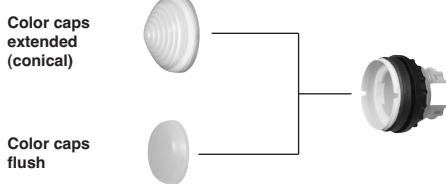


Complete Standard Units

Solid pilot lights



Contact Blocks and LED Pilot Light Assemblies

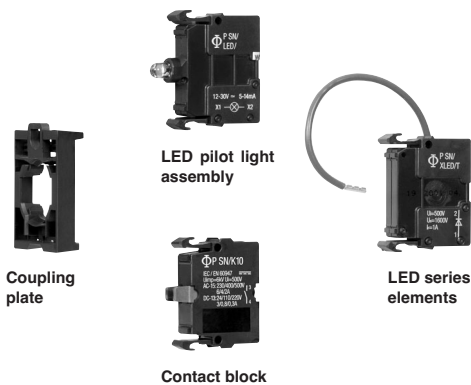
















Potentiometer





















Cam switches










Complete Standard Units

Push Buttons Pilot Lights	Code	Rotary Switches Double-Push Buttons, Potentiometer	Code
<p>Push buttons flush, IP 67/IP 69K non-illuminated</p>  <p>green </p> <p>red </p> <p>green I </p> <p>red O </p>	<p>P SN-WD0001</p> <p>P SN-WD0002</p> <p>P SN/D/G/X1-K10</p> <p>P SN/D/R/X0-K01</p>	<p>Rotary switches, IP 66 non-illuminated, latched (changeable by coding pieces to spring return function)</p>  <p>2 positions </p> <p>3 positions </p>	<p>P SN/WRK-K10</p> <p>P SN/WRK3-K20</p>
<p>Pilot lights flush, IP 67/IP 69K with LED element</p>  <p>green 12 V-30 V AC/DC</p> <p>red 12 V-30 V AC/DC</p> <p>green 85 V-264 V AC</p> <p>red 85 V-264 V AC</p>	<p>P SN-WD0003</p> <p>P SN-WD0004</p> <p>P SN-WD0005</p> <p>P SN-WD0006</p>	<p>Double-push buttons, IP 66 with LED element, color cap opaque</p>  <p>85 V-264 V AC</p> <p>green I </p> <p>red O </p>	<p>P SN/DDL/GR/X1-X0-K11</p>
<p>Solid pilot lights, IP 67/IP 69K for direct wire (without bulb), bulb holder BA 9s</p> <p>flush</p>  <p>green</p> <p>red</p> <p>yellow</p> <p>blue</p> <p>opaque</p>	<p>P SN/LC/G</p> <p>P SN/LC/R</p> <p>P SN/LC/Y</p> <p>P SN/LC/B</p> <p>P SN/LC/W</p>	<p>Potentiometer, IP 66 3 separate screw terminals, $P_{max.} = 0,5 \text{ W}$</p>  <p>1 kΩ</p> <p>4,7 kΩ</p> <p>10 kΩ</p>	<p>P SN/R1K</p> <p>P SN/R4K7</p> <p>P SN/R10K</p>
<p>extended (conical)</p>  <p>green</p> <p>red</p> <p>yellow</p> <p>blue</p> <p>opaque</p>	<p>P SN/LCH/G</p> <p>P SN/LCH/R</p> <p>P SN/LCH/Y</p> <p>P SN/LCH/B</p> <p>P SN/LCH/W</p>	<p>Other resistance values on request.</p>	

Complete Standard Units

Emergency Stop Push Buttons	Code	Cam Switches	Code
<p>Emergency stop push buttons, IP 66/IP 69K fool-proof acc. to ISO 13850/EN 418 reset by pulling complement max: 4 contact blocks</p>  <p>red </p> <p>red </p>	<p>P SN/PV-K01</p> <p>P SN/PV-K11</p>	<p>Cam switches, IP 65 ON/OFF switches</p> <p>1 pole</p>  	<p>CG4 A200-600 FS1</p> <p>CG4 A290-600 FS1</p>
<p>reset by key operation 1 key, locking MS1</p>  <p>red </p>	<p>P SN/PVS-K01</p>	<p>Double-throw switches</p>  <p>1 pole</p> <p>2 pole</p> 	<p>CG4 A210-600 FS1</p> <p>CG4 A211-600 FS1</p>
<p>top yellow, bottom black reset by pulling complement max: 3 contact blocks</p>  <p>red </p> <p>red </p>	<p>P SN/PV-KC11-IY</p> <p>P SN/PV-KC02-IY</p>	<p>Double-throw switches with spring return to center</p> <p>1 pole</p>  	<p>CG4 A214-600 FS1</p>
<p>foot and palm switch, IP 67/IP 69K top yellow, bottom black reset by pulling</p>  <p>red </p>	<p>P FT/R-V-KC01-IY</p>	<p>Double-throw switches with electrically isolated contacts</p> <p>1 pole</p>  	<p>CG4 A710-600 FS1</p>
		<p>For further cam switches, refer to Catalog 120.</p>	







Pre-assembled Front Elements

Push Buttons Pilot Lights	Code	Rotary Switches Double-Push Buttons	Code		
Push buttons, IP 67/IP 69K 	flush, non-illuminated	Rotary switches, IP 66 switching angle 60°, latched ¹ 	2 positions, non-illuminated ↘ 3 positions, non-illuminated ↘ 2 positions, illuminated ↘ 3 positions, illuminated ↘ 2 positions key can be removed in ○ ↘ key can be only removed in ○ ↘  3 positions key can be removed in ○ ↘ key can be only removed in ○ ↘ Double-push buttons, IP 66 color cap opaque 		
	green			P SN/D/G	P SN/WRK
	red			P SN/D/R	P SN/WKV
	green I			P SN/D/G/X1	
	red ○			P SN/D/R/X0	
	flush, illuminated				P SN/WRK3
	green			P SN/DL/G	
	red			P SN/DL/R	
	green I			P SN/DL/G/X1	P SN/WRLK/G
	red ○			P SN/DL/R/X0	P SN/WRLK/R
Push buttons, IP 67/IP 69K 	extended, non-illuminated		P SN/WRLK/Y		
	green	P SN/DH/G	P SN/WRLK/B		
	red	P SN/DH/R	P SN/WRLK/W		
	extended, illuminated		P SN/WRLK3/G		
	green	P SN/DLH/G	P SN/WRLK3/R		
	red	P SN/DLH/R	P SN/WRLK3/Y		
Pilot lights, IP 67/IP 69K flush 	green	P SN/L/G	P SN/WRLK3/B		
	red	P SN/L/R	P SN/WRLK3/W		
	yellow	P SN/L/Y			
	blue	P SN/L/B			
	opaque	P SN/L/W			
	extended (conical) 	green	P SN/LH/G		
red		P SN/LH/R			
yellow		P SN/LH/Y			
blue		P SN/LH/B			
opaque		P SN/LH/W			
				P SN/WRS	
			P SN/WRS/A1		
			P SN/WRS3		
			P SN/WRS3/A1		
			P SN/DDL/GR		
			P SN/DDL/GR/X1-X0		
			P SN/DDL/GR/GB1-GB0		
			P SN/DDL/S/X7-X7		











¹changeable by coding pieces to spring return function (40° switching angle)

Pre-assembled Front Elements









Front Element Components

Emergency Stop Push Buttons Reset Units	Code	Push Buttons Front Plates	Code
<p>Emergency stop push buttons IP 67/IP 69K (turning) IP 66/IP 69K (pulling) fool-proof acc. to ISO 13 850/EN 418 complement max.: 4 contact blocks</p> <p>non-illuminated</p> <p>reset by pulling red</p> <p>reset by turning red</p>	<p>P SN/PV</p> <p>P SN/PVT</p>	<p>Push buttons, IP 67/IP 69K without front plate with flush front ring, non-illuminated</p>  <p>momentary</p> <p>latched</p>	<p>P SN/D/X</p> <p>P SN/DR/X</p>
 <p>illuminated</p> <p>reset by pulling red</p> <p>reset by turning red</p>	<p>P SN/PVL</p> <p>P SN/PVLT</p>	<p>Push buttons, IP 67/IP 69K without front plate with extended front ring, non-illuminated</p>  <p>momentary</p>	<p>P SN/DG/X</p>
<p>reset by key operation 1 key, locking MS1</p> <p>red</p>	<p>P SN/PVS</p>	<p>Front plates, flush</p>  <p>green</p> <p>red</p> <p>yellow</p> <p>blue</p> <p>white</p> <p>black</p> <p>legends see page 13</p>	<p>P SN/XD/G</p> <p>P SN/XD/R</p> <p>P SN/XD/Y</p> <p>P SN/XD/B</p> <p>P SN/XD/W</p> <p>P SN/XD/S</p>
<p>Reset units, IP 67/IP 69K non-illuminated</p>  <p>blue RESET</p> <p>blue R</p>	<p>P SN/DZ/B/GB14</p> <p>P SN/DZ/B/X6</p>	<p>Front plates, extended</p>  <p>green</p> <p>red</p> <p>yellow</p> <p>blue</p> <p>white</p> <p>black</p> <p>legends see page 13</p>	<p>P SN/XDH/G</p> <p>P SN/XDH/R</p> <p>P SN/XDH/Y</p> <p>P SN/XDH/B</p> <p>P SN/XDH/W</p> <p>P SN/XDH/S</p>

Front Element Components and Legend Plates












Mushroom Push Buttons Front Plates, Push Buttons	Code	Front Plates, Pilot Lights Color Caps, Emergency Stop Plates	Code
<p>Mushroom push buttons, IP 67/IP 69K without front plate</p>  <p>momentary</p> <p>green</p> <p>red</p> <p>yellow</p> <p>black</p> <p>latched</p> <p>green</p> <p>red</p> <p>yellow</p> <p>black</p> <p>Front plates</p>  <p>green</p> <p>red</p> <p>yellow</p> <p>white</p> <p>black</p> <p>legends see page 15</p>	<p>P SN/DP/G/X</p> <p>P SN/DP/R/X</p> <p>P SN/DP/Y/X</p> <p>P SN/DP/S/X</p> <p>P SN/DRP/G/X</p> <p>P SN/DRP/R/X</p> <p>P SN/DRP/Y/X</p> <p>P SN/DRP/S/X</p> <p>P SN/XDP/G</p> <p>P SN/XDP/R</p> <p>P SN/XDP/Y</p> <p>P SN/XDP/W</p> <p>P SN/XDP/S</p>	<p>Front plates, flush</p> <p>green</p> <p>red</p> <p>yellow</p> <p>blue</p> <p>opaque</p> <p>legends see page 14</p>  <p>Front plates, extended</p> <p>green</p> <p>red</p> <p>yellow</p> <p>blue</p> <p>opaque</p> <p>legends see page 14</p>  <p>Pilot light, IP 67, IP 69K flush, without color cap</p> 	<p>P SN/XDL/G</p> <p>P SN/XDL/R</p> <p>P SN/XDL/Y</p> <p>P SN/XDL/B</p> <p>P SN/XDL/W</p> <p>P SN/XDLH/G</p> <p>P SN/XDLH/R</p> <p>P SN/XDLH/Y</p> <p>P SN/XDLH/B</p> <p>P SN/XDLH/W</p> <p>P SN/L/X</p>
<p>Push buttons, IP 67/IP 69K without front plate with flush front ring, illuminated</p>  <p>momentary</p> <p>latched</p>	<p>P SN/DL/X</p> <p>P SN/DRL/X</p>	<p>Color caps</p> <p>green</p> <p>red</p> <p>yellow</p> <p>blue</p> <p>opaque</p> <p>legends see page 16</p> 	<p>P SN/XL/G</p> <p>P SN/XL/R</p> <p>P SN/XL/Y</p> <p>P SN/XL/B</p> <p>P SN/XL/W</p>
<p>Push buttons, IP 67/IP 69K without front plate with extended front ring, illuminated</p>  <p>momentary</p>	<p>P SN/DGL/X</p>	<p>Emergency stop plates, IP 66 rectangular</p> <p>33 mm x 50 mm</p> <p>German</p> <p>English</p>  <p>square, in four languages</p> <p>50 mm x 50 mm</p> 	<p>P SN/XZK/D99</p> <p>P SN/XZK/GB99</p> <p>P SN/XYK1</p>

Legend Plates, Coupling Plate and Pilot Light Assemblies









Emergency Stop Plates Legend Carrier, Legend Insert	Code	Legend Plates, Coupling Plate LED Pilot Light Assemblies	Code
<p>Emergency stop plates, IP 66 round, in four languages</p> <p>Ø 90 mm</p> <p>Ø 60 mm</p> 	<p>P SN/XAK1</p> <p>P SN/XBK1</p>	<p>Legend plates, IP 66 complete standard unit</p>  <p>○ I</p> <p>○ I</p> <p>I ○ II</p> <p>STOP</p> <p>START</p> <p>Aus</p> <p>OFF</p> <p>Ein</p> <p>ON</p> <p>Störung</p> <p>FAULT</p> <p>Betrieb</p> <p>RUN</p>	<p>P SB/ST/X88</p> <p>P SB/ST/X89</p> <p>P SB/ST/X93</p> <p>P SB/ST/GB0</p> <p>P SB/ST/GB1</p> <p>P SB/ST/D5</p> <p>P SB/ST/GB5</p> <p>P SB/ST/D6</p> <p>P SB/ST/GB6</p> <p>P SB/ST/D8</p> <p>P SB/ST/GB8</p> <p>P SB/ST/D7</p> <p>P SB/ST/GB7</p>
<p>Legend carrier, IP 66 without plate</p> <p>for push buttons</p> 	<p>P SB/ST/X</p>	<p>HAND AUTO</p> <p>MAN. AUTO</p> <p>Aus Ein</p> <p>OFF ON</p> <p>HAND ○ AUTO</p> <p>MAN. ○ AUTO</p>	<p>P SB/ST/D11</p> <p>P SB/ST/GB11</p> <p>P SB/ST/D10</p> <p>P SB/ST/GB10</p> <p>P SB/ST/D12</p> <p>P SB/ST/GB12</p>
<p>for double-push buttons</p> 	<p>P SB/STDD/X</p>	<p>Coupling plate</p> 	<p>P SNA</p>
<p>Legend insert</p> 	<p>P SN/XST</p>	<p>LED pilot light assemblies front mounting</p>  <p>12 V-30 V AC/DC</p> <p>green</p> <p>red</p> <p>white¹</p> <p>85 V-264 V AC</p> <p>green</p> <p>red</p> <p>white¹</p> <p>P SN/LED/G</p> <p>P SN/LED/R</p> <p>P SN/LED/W</p> <p>P SN/LED230/G</p> <p>P SN/LED230/R</p> <p>P SN/LED230/W</p> <p>base mounting</p>  <p>12 V-30 V AC/DC</p> <p>green</p> <p>red</p> <p>white¹</p> <p>85 V-264 V AC</p> <p>green</p> <p>red</p> <p>white¹</p> <p>P SN/LEDC/G</p> <p>P SN/LEDC/R</p> <p>P SN/LEDC/W</p> <p>P SN/LEDC230/G</p> <p>P SN/LEDC230/R</p> <p>P SN/LEDC230/W</p>	

¹can be combined with blue, yellow or white pilot lights







Series Elements, Contact Blocks, Enclosures and Accessories

LED Series Elements Contact Blocks, Enclosures	Code	Enclosures Blanking Plug, Lamps	Code
<p>LED series elements for front mounting and base mounting</p>  <p>resistor element for 42 V-60 V AC/DC for pilot light assemblies 12 V-30 V AC/DC</p> <p>LED test elements for decoupled operational test for connecting to: 12 V-30 V AC/DC</p> <p>85 V-264 V AC</p>	<p>P SN/XLED60</p> <p>P SN/XLED/T</p> <p>P SN/XLED230/T</p>	<p>Plastic enclosure, IP 67/IP 69K totally insulated, lid screws made of stainless steel</p> <p>top gray, bottom black</p>  <p>control positions Ø 22,5 mm</p> <p>1</p>	<p>P SN/I1</p>
<p>Contact blocks front mounting</p>  	<p>P SN/K10</p> <p>P SN/K01</p>	<p>top gray, bottom black</p>  <p>control positions Ø 22,5 mm</p> <p>2</p> <p>3</p> <p>4</p> <p>6</p>	<p>P SN/I2</p> <p>P SN/I3</p> <p>P SN/I4</p> <p>P SN/I6</p>
<p>for plastic enclosures</p>  	<p>P SN/KC10</p> <p>P SN/KC01</p>	<p>Blanking plug, IP 67/IP 69K gray, for surplus control positions</p> 	<p>P SN/B</p>
<p>Plastic enclosure, IP 67/IP 69K totally insulated, lid screws made of stainless steel</p> <p>top yellow, bottom black</p>  <p>control positions Ø 22,5 mm</p> <p>1</p>	<p>P SN/IY1</p>	<p>Lamps, BA 9s for solid pilot lights</p> <p>filament bulbs</p> <p>6 V 2 W P SN/GL6</p> <p>12 V 2 W P SN/GL12</p> <p>24 V 2 W P SN/GL24</p> <p>48 V 2 W P SN/GL48</p> <p>60 V 2 W P SN/GL60</p> <p>110 V-130 V 2,4 W P SN/GL130</p> <p>neon bulbs</p> <p>110 V-130 V AC 0,1 W P SN/GIL110K</p> <p>220 V-240 V AC 0,33 W P SN/GIL220K</p>  	

Accessories

Bulb Extractor Protection Caps	Code	Protective Shrouds Rod Link, Coding Pieces	Code
<p>Bulb extractor</p> 	<p>P SN/LG</p>	<p>Protective shroud, IP 66 protection against accidental operation for push buttons and rotary switches (cannot be combined with legend plates)</p> 	<p>P SN/XGWK</p>
<p>Protection caps, IP 67 transparent, for aggravating environments (not in food areas) (cannot be combined with legend plates)</p>  <p>push buttons, flush pilot lights, flush</p>	<p>P SN/T/D</p>	<p>Protective shroud, IP 65 yellow, for emergency stop buttons (cannot be combined with legend plates)</p> 	<p>P SN/XGPV</p>
 <p>double-push buttons</p>	<p>P SN/DD</p>	<p>Rod link for operating the middle contact block of non-illuminated rotary switches with 3 positions</p> 	<p>P SN/XW</p>
<p>Protection cap prevents dirt and dust from getting into the keyhole (not food resistant)</p>  <p>rotary switches, key operated</p>	<p>P SN/XWS</p>	<p>Coding pieces for rotary switches to convert the latched function into spring return function (1 kit = 2 pieces)</p> 	<p>P SN/XC/Y</p>

Accessories

Track Adapter Nut Key	Code	Fixation Nut Spare Key	Code
<p>Track adapter for tracks acc. to EN 50 022 for front mounted units</p> 	<p>P SN/IVS</p>	<p>Fixation nut for push buttons, pilot lights and rotary switches</p> 	<p>P SN/GR</p>
<p>Nut key for push buttons, pilot lights and rotary switches</p> 	<p>P SN/MS</p>	<p>for cam switches</p> 	<p>S00 T170 10</p>
<p>for cam switches</p> 	<p>S00 T170 09</p>	<p>Spare key locking MS1</p> 	<p>P SN/ES/MS1</p>

Front Plates for Push Buttons

Front Plates for Push Buttons non-illuminated				Code	Code
Color	Legend	Symbol	Meaning	Front Plates flush	Front Plates extended
black	Zu			P SN/XD/S/D2	P SN/XDH/S/D2
	Auf			P SN/XD/S/D3	P SN/XDH/S/D3
	Ab			P SN/XD/S/D4	P SN/XDH/S/D4
red	Aus			P SN/XD/R/D5	P SN/XDH/R/D5
black	Ein			P SN/XD/S/D6	P SN/XDH/S/D6
blue	Entsperren			P SN/XD/B/D14	P SN/XDH/B/D14
black	Vorwärts			P SN/XD/S/D15	P SN/XDH/S/D15
	Rückwärts			P SN/XD/S/D16	P SN/XDH/S/D16
	Heben			P SN/XD/S/D17	P SN/XDH/S/D17
	Senken			P SN/XD/S/D18	P SN/XDH/S/D18
red	STOP			P SN/XD/R/GB0	P SN/XDH/R/GB0
black	STOP			P SN/XD/S/GB0	P SN/XDH/S/GB0
green	START			P SN/XD/G/GB1	P SN/XDH/G/GB1
white	START			P SN/XD/W/GB1	P SN/XDH/W/GB1
black	CLOSE			P SN/XD/S/GB2	P SN/XDH/S/GB2
	UP			P SN/XD/S/GB3	P SN/XDH/S/GB3
	DOWN			P SN/XD/S/GB4	P SN/XDH/S/GB4
red	OFF			P SN/XD/R/GB5	P SN/XDH/R/GB5
black	ON	P SN/XD/S/GB6	P SN/XDH/S/GB6		
	TEST	P SN/XD/S/GB9	P SN/XDH/S/GB9		
blue	RESET	P SN/XD/B/GB14	P SN/XDH/B/GB14		
black	FORWARD	P SN/XD/S/GB15	P SN/XDH/S/GB15		
	REVERSE	P SN/XD/S/GB16	P SN/XDH/S/GB16		
	RAISE	P SN/XD/S/GB17	P SN/XDH/S/GB17		
	LOWER	P SN/XD/S/GB18	P SN/XDH/S/GB18		
red		○	stop	P SN/XD/R/X0	P SN/XDH/R/X0
black		○		P SN/XD/S/X0	P SN/XDH/S/X0
green		I	start	P SN/XD/G/X1	P SN/XDH/G/X1
black		I		P SN/XD/S/X1	P SN/XDH/S/X1
white		I		P SN/XD/W/X1	P SN/XDH/W/X1
green		II		P SN/XD/G/X2	P SN/XDH/G/X2
black		II		P SN/XD/S/X2	P SN/XDH/S/X2
		+	increase	P SN/XD/S/X4	P SN/XDH/S/X4
		-	decrease	P SN/XD/S/X5	P SN/XDH/S/X5
blue		R	reset	P SN/XD/B/X6	P SN/XDH/B/X6
black		↑	guide motion	P SN/XD/S/X7	P SN/XDH/S/X7
		↙		P SN/XD/S/X8	P SN/XDH/S/X8
		✋	hand-control	P SN/XD/S/X9	P SN/XDH/S/X9
		@	automatic cycle	P SN/XD/S/X10	P SN/XDH/S/X10
		⊕	inching	P SN/XD/S/X11	P SN/XDH/S/X11
		⏏	disengaging	P SN/XD/S/X12	P SN/XDH/S/X12
		🔓	unlock	P SN/XD/S/X13	P SN/XDH/S/X13
	⚙️	tighten	P SN/XD/S/X14	P SN/XDH/S/X14	
	👉	release	P SN/XD/S/X15	P SN/XDH/S/X15	
	👉	liquid	P SN/XD/S/X16	P SN/XDH/S/X16	
	📢	horn	P SN/XD/S/X17	P SN/XDH/S/X17	

Front Plates for Push Buttons

Front Plates for Push Buttons illuminated				Code	Code
Color	Legend	Symbol	Meaning	Front Plates flush	Front Plates extended
opaque	Zu			P SN/XDL/W/D2	P SN/XDLH/W/D2
	Auf			P SN/XDL/W/D3	P SN/XDLH/W/D3
	Ab			P SN/XDL/W/D4	P SN/XDLH/W/D4
red	Aus			P SN/XDL/R/D5	P SN/XDLH/R/D5
opaque	Ein			P SN/XDL/W/D6	P SN/XDLH/W/D6
blue	Entsperren			P SN/XDL/B/D14	P SN/XDLH/B/D14
opaque	Vorwärts			P SN/XDL/W/D15	P SN/XDLH/W/D15
	Rückwärts			P SN/XDL/W/D16	P SN/XDLH/W/D16
	Heben			P SN/XDL/W/D17	P SN/XDLH/W/D17
	Senken			P SN/XDL/W/D18	P SN/XDLH/W/D18
red	STOP			P SN/XDL/R/GB0	P SN/XDLH/R/GB0
opaque	STOP			P SN/XDL/W/GB0	P SN/XDLH/W/GB0
green	START			P SN/XDL/G/GB1	P SN/XDLH/G/GB1
opaque	START			P SN/XDL/W/GB1	P SN/XDLH/W/GB1
	CLOSE			P SN/XDL/W/GB2	P SN/XDLH/W/GB2
	UP			P SN/XDL/W/GB3	P SN/XDLH/W/GB3
	DOWN			P SN/XDL/W/GB4	P SN/XDLH/W/GB4
red	OFF			P SN/XDL/R/GB5	P SN/XDLH/R/GB5
opaque	ON	P SN/XDL/W/GB6	P SN/XDLH/W/GB6		
	TEST	P SN/XDL/W/GB9	P SN/XDLH/W/GB9		
blue	RESET	P SN/XDL/B/GB14	P SN/XDLH/B/GB14		
opaque	FORWARD	P SN/XDL/W/GB15	P SN/XDLH/W/GB15		
	REVERSE	P SN/XDL/W/GB16	P SN/XDLH/W/GB16		
	RAISE	P SN/XDL/W/GB17	P SN/XDLH/W/GB17		
	LOWER	P SN/XDL/W/GB18	P SN/XDLH/W/GB18		
red		○	stop	P SN/XDL/R/X0	P SN/XDLH/R/X0
opaque		○		P SN/XDL/W/X0	P SN/XDLH/W/X0
green		I	start	P SN/XDL/G/X1	P SN/XDLH/G/X1
opaque		I		P SN/XDL/W/X1	P SN/XDLH/W/X1
green		II		P SN/XDL/G/X2	P SN/XDLH/G/X2
opaque		II		P SN/XDL/W/X2	P SN/XDLH/W/X2
		+	increase	P SN/XDL/W/X4	P SN/XDLH/W/X4
		-	decrease	P SN/XDL/W/X5	P SN/XDLH/W/X5
blue		R	reset	P SN/XDL/B/X6	P SN/XDLH/B/X6
opaque		↑	guide motion	P SN/XDL/W/X7	P SN/XDLH/W/X7
		↖		P SN/XDL/W/X8	P SN/XDLH/W/X8
		✋	hand-control	P SN/XDL/W/X9	P SN/XDLH/W/X9
		⌚	automatic cycle	P SN/XDL/W/X10	P SN/XDLH/W/X10
		⊕	inching	P SN/XDL/W/X11	P SN/XDLH/W/X11
		⬆️	disengaging	P SN/XDL/W/X12	P SN/XDLH/W/X12
		↔️	unlock	P SN/XDL/W/X13	P SN/XDLH/W/X13
		⚙️	tighten	P SN/XDL/W/X14	P SN/XDLH/W/X14
	🔓	release	P SN/XDL/W/X15	P SN/XDLH/W/X15	
	🍷	liquid	P SN/XDL/W/X16	P SN/XDLH/W/X16	
	📣	horn	P SN/XDL/W/X17	P SN/XDLH/W/X17	

Front Plates for Mushroom Push Buttons

Front Plates for Mushroom Push Buttons				Code
Color	Legend	Symbol	Meaning	
black	Zu			P SN/XDP/S/D2
	Auf			P SN/XDP/S/D3
	Ab			P SN/XDP/S/D4
red	Aus			P SN/XDP/R/D5
black	Ein			P SN/XDP/S/D6
	Vorwärts			P SN/XDP/S/D15
	Rückwärts			P SN/XDP/S/D16
	Heben			P SN/XDP/S/D17
	Senken			P SN/XDP/S/D18
red	STOP			P SN/XDP/R/GB0
black	STOP			P SN/XDP/S/GB0
green	START			P SN/XDP/G/GB1
white	START			P SN/XDP/W/GB1
black	CLOSE			P SN/XDP/S/GB2
	UP			P SN/XDP/S/GB3
	DOWN			P SN/XDP/S/GB4
red	OFF			P SN/XDP/R/GB5
black	ON			P SN/XDP/S/GB6
	TEST	P SN/XDP/S/GB9		
	FORWARD	P SN/XDP/S/GB15		
	REVERSE	P SN/XDP/S/GB16		
	RAISE	P SN/XDP/S/GB17		
	LOWER	P SN/XDP/S/GB18		
red		○	stop	P SN/XDP/R/X0
black		○		P SN/XDP/S/X0
green		I	start	P SN/XDP/G/X1
black		I		P SN/XDP/S/X1
white		I		P SN/XDP/W/X1
green		II		P SN/XDP/G/X2
black		II		P SN/XDP/S/X2
		+	increase	P SN/XDP/S/X4
		-	decrease	P SN/XDP/S/X5
		↑	guide motion	P SN/XDP/S/X7
		↖		P SN/XDP/S/X8
		✋	hand-control	P SN/XDP/S/X9
		@	automatic cycle	P SN/XDP/S/X10
		⊕	inching	P SN/XDP/S/X11
		↕	disengaging	P SN/XDP/S/X12
		⚙	unlock	P SN/XDP/S/X13
		⚙	tighten	P SN/XDP/S/X14
👉	release	P SN/XDP/S/X15		
👉	liquid	P SN/XDP/S/X16		
📣	horn	P SN/XDP/S/X17		

Color Caps for Pilot Lights


Color Caps for Pilot Lights flush				Code
Color	Legend	Symbol	Meaning	Front Plates flush
opaque	Zu			P SN/XL/W/D2
	Auf			P SN/XL/W/D3
	Ab			P SN/XL/W/D4
red	Aus			P SN/XL/R/D5
opaque	Ein			P SN/XL/W/D6
	Vorwärts			P SN/XL/W/D15
	Rückwärts			P SN/XL/W/D16
	Heben			P SN/XL/W/D17
	Senken			P SN/XL/W/D18
red	STOP			P SN/XL/R/GB0
opaque	STOP			P SN/XL/W/GB0
green	START			P SN/XL/G/GB1
opaque	START			P SN/XL/W/GB1
	CLOSE			P SN/XL/W/GB2
	UP			P SN/XL/W/GB3
	DOWN			P SN/XL/W/GB4
red	OFF			P SN/XL/R/GB5
opaque	ON			P SN/XL/W/GB6
	TEST			P SN/XL/W/GB9
	FORWARD			P SN/XL/W/GB15
	REVERSE	P SN/XL/W/GB16		
	RAISE	P SN/XL/W/GB17		
	LOWER	P SN/XL/W/GB18		
red		○	stop	P SN/XL/R/X0
opaque		○		P SN/XL/W/X0
green		I	start	P SN/XL/G/X1
opaque		I		P SN/XL/W/X1
green		II		P SN/XL/G/X2
opaque		II	P SN/XL/W/X2	
		+	increase	P SN/XL/W/X4
		-	decrease	P SN/XL/W/X5
		↑	guide motion	P SN/XL/W/X7
		↖		P SN/XL/W/X8
		✋	hand-control	P SN/XL/W/X9
		@	automatic cycle	P SN/XL/W/X10
		⊕	inching	P SN/XL/W/X11
		↕	disengaging	P SN/XL/W/X12
		⚙	unlock	P SN/XL/W/X13
		⚙	tighten	P SN/XL/W/X14
		🔧	release	P SN/XL/W/X15
	🔧	liquid	P SN/XL/W/X16	
	🔧	horn	P SN/XL/W/X17	

Design


Programming and Circuit Design

Programming for converting the latched function into spring return function

Push buttons

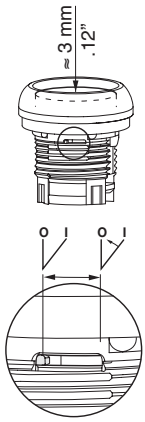


Rotary switches



P SN/XC/Y

Rod link for operating the middle contact block of non-illuminated rotary switches with 2 and 3 positions



P SN/XC/Y in B




P SN/XC/Y in A and B

Key cannot be removed in spring return position

LED resistor element


P SN/XLED60

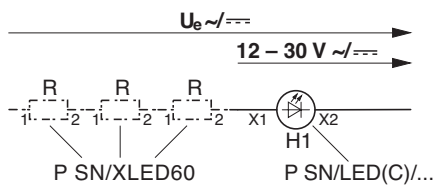




P SN/XLED60	1x	2x	3x	4x	5x	6x	7x
$U_e \leq$	60 V	90 V	120 V	150 V	180 V	210 V	240 V

LED test element

P SN/XLED/T

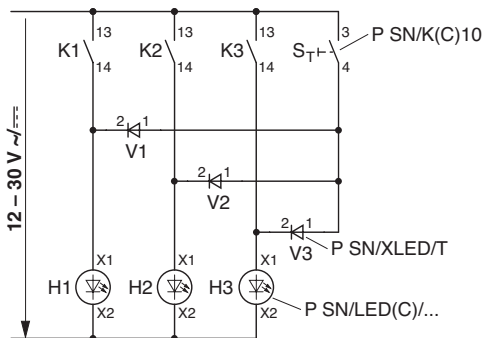

P SN/XLED230/T

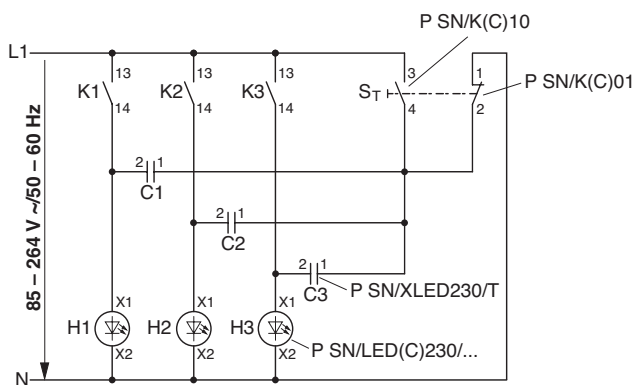


P SN/XLED230/T	1x	2x
$U_e \leq$	400 V AC	500 V AC



Dimensions mm
inch

Operating and Indicator Devices, Push Buttons, Rotary Switches, Rotary Switches key operated, Pilot Lights, Push Buttons illuminated, Mushroom Push Buttons, Solid Pilot Lights, Emergency Stop Push Button, Potentiometer

Operating and indicator devices

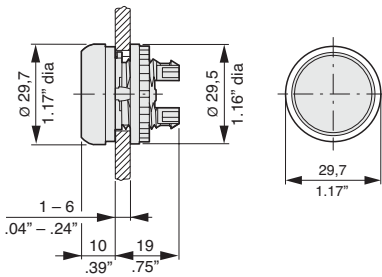

Push buttons






P SN/D

P SN/DH

P SN/DG(L)

P SN/DD

Push buttons P SN/D base mounting





Rotary switches

P SN/W(R)K...
P SN/W(R)LK...

Rotary switches key operated

P SN/WRS



Pilot lights

P SN/LH

P SN/L






Push buttons illuminated

P SN/DL

P SN/DLH

Mushroom push buttons

P SN/DP



Solid pilot lights

P SN/LC...





P SN/LCH...

Emergency stop push button

P SN/PV.
P SN/PVT.
P SN/PVL.
P SN/PVS

Potentiometer


P SN/R...K




Dimensions mm
inch

Front Mounting


Fixing adapter
P SN/A




Pilot lights and illuminated push buttons

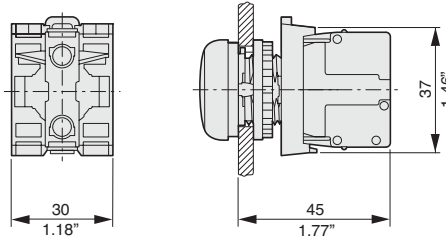


**Push buttons with P SN/K...
Push buttons with P SN/LED... + P SN/XLED...**

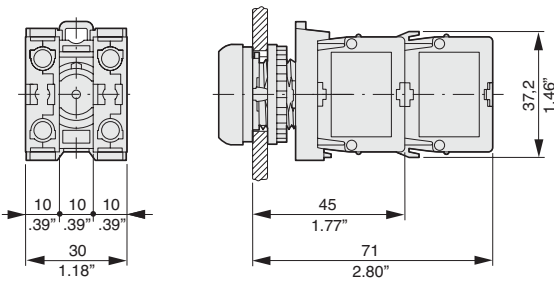


Track adapter

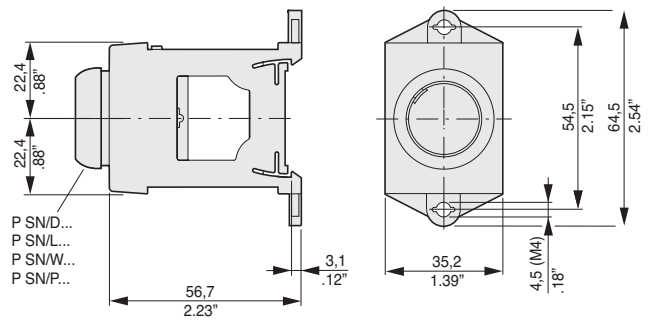

Foot and palm switches
P FT/R-V-KC01-IY

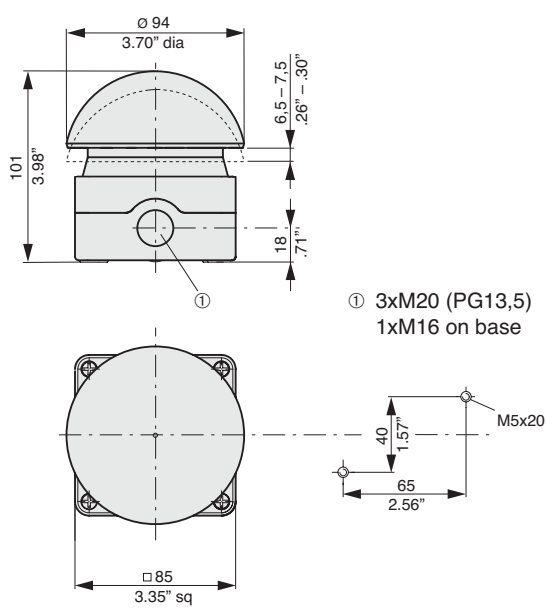

Plastic enclosure

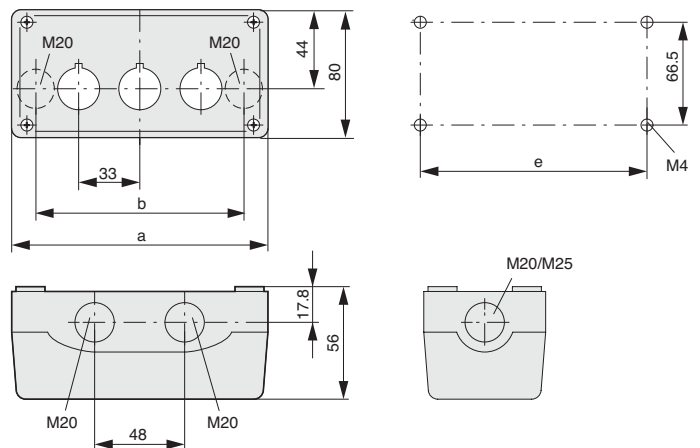


Type	Control positions	a	b	e	Cable entries
P SN/I (Y)1	1	72	42,6	58,5	2xM16 3xM20 2xM25
P SN/I2	2	120	85,6	106,5	2xM20 3xM20 2xM25
P SN/I3	3	153	118,6	139,5	2xM20 2xM25 4xM20
P SN/I4	4	186	151,6	172,5	2xM20 2xM25 4xM20
P SN/I6	6	252	217,6	238,5	2xM20 2xM25 4xM20


Legend Carrier

Legend carrier


P SB/ST




P SB/STDD

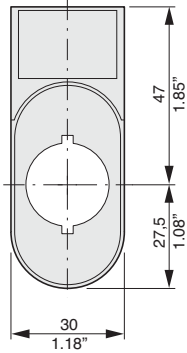


Mounting drilling with slot




Grid dimension acc. to IEC/EN 60947

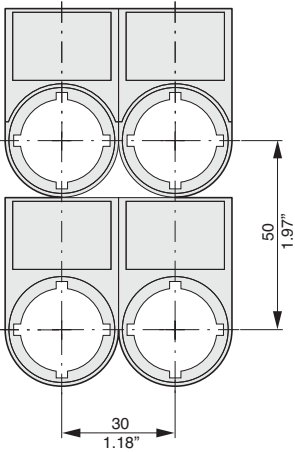

Grid dimension for different combinations




Protection cap with legend carrier cannot be combined




Type	A _z		B _z	
	mm	inch	mm	inch
P SN/...(IEC/EN 60947)	30	1.18	50	1.97
P SN/...	30	1.18	40	1.57
P SN/D... + P SN/T/D	33	1.30	40	1.57
P SN/D(R)P...	38	1.50	40	1.57
P SN/PV...	38	1.50	40	1.57
P SN/PV(L...)(S...) + P SN/D...	33	1.30	40	1.57
P SN/DDL...	30	1.18	55	2.17
P SN/DDL... + P SN/T/DD	33	1.30	58	2.28
P SB/ST	30	1.18	50	1.97
P SB/STDD	30	1.18	75	2.95
P SN/XAK...	90	3.54	90	3.54
P SN/XZK...	33	1.30	52	2.05
P SN/XBK...	60	2.36	60	2.36
P SN/XYK...	50	1.97	50	1.97


Grid dimension for P SN/DD...

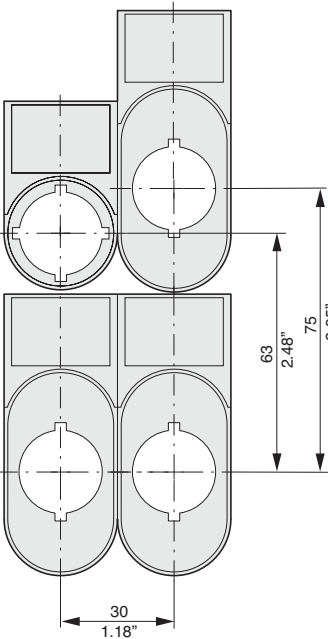

Grid dimension for P SN/DD... with protection cap P SN/T/DD

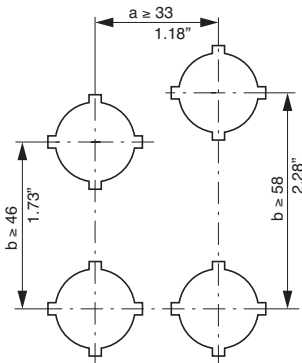


Protection cap and protection shroud with legend carrier cannot be combined




Dimensions mm
inch

Blanking Plug, Protection Caps, Protective Shroud, Emergency Stop Plates, Cam Switches


Blanking plug
P SN/B




Protection cap
P SN/T/D





Protection cap
P SN/T/DD

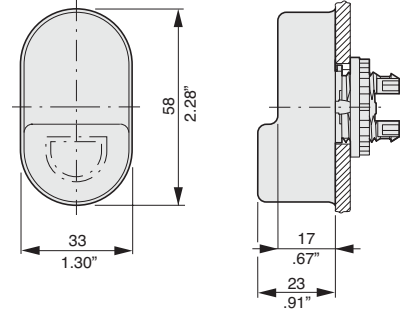


Protective shroud
P SN/XGWK




P SN/XGPV




Protection cap
P SN/XWS

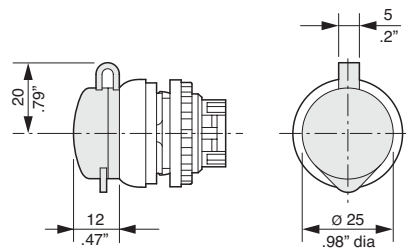


Emergency stop plates
P SN/XAK




P SN/XZK...







P SN/XBK...



P SN/XYK1



Cam switches



B	C	D	M
28	5	29,5	12,5
1.1	.2	1.16	.49
L 1 stage		L 2 stages	
38,5		50,5	
1.52		1.99	

Technical Data

			Contact Blocks	LED Elements	Push Buttons Mushroom P/B momentary	Double-Push Buttons	Rotary Switches Rotary Switches illuminated	
General								
Standards and requirements			IEC/EN 60947, VDE 0660					
Mechanical life	operations	x 10 ⁶	5	–	5	0,2	0,1	
Max. operating frequency		S/h	3600	–	3600	3600	2000	
Operating force		N	≤ 5	–	≤ 5	≤ 5	–	
Operating torque		Nm	≤ 0,8 (screw terminals)	≤ 0,8 (screw terminals)	–	–	≤ 0,3	
Protection IEC/EN 60529			IP 20	IP 20	IP 67/IP 69K	IP 66	IP 66	
Environmental resistance			humidity, constant, acc. to IEC 60068-2-78					
			humidity, cyclic, acc. to IEC 60068-2-30					
Ambient temperature	open	min./max.	°C	-25/+70	-25/+70 ¹	-25/+70	-25/+70	-25/+70
Mounting position				any	any	any	any	any
Shock withstand acc. to IEC 60068-2-27			g	> 30	> 30	> 30	> 30	> 30
Shock period 11 ms, 1/2 sinus wave								
Max. permissible wire gage								
single core	min.-max.	mm ²	0,75-2,5	0,75-2,5	–	–	–	–
stranded wire	min.-max.	mm ²	0,5-2,5	0,5-2,5	–	–	–	–
Current Paths								
Rated impulse withstand voltage U _{imp}		V	6000	6000	–	–	–	
Rated insulation voltage U _i		V	500	500	–	–	–	
Overtoltage category/ Pollution degree			III/3	III/3	–	–	–	
Control circuit reliability at								
24 V DC/5 mA	fault frequency H _F		< 10 ⁻⁷ , < 1 failure per 10 ⁷ operations					
5 V DC/1 mA	fault frequency H _F		< 5 x 10 ⁻⁶ , < 1 failure per 5 x 10 ⁶ operations					
Max. fuse size	characteristic	A gL/gG	10	–	–	–	–	
Switching Capacity								
Rated operational current I _e								
AC-15								
115 V		A	6	–	–	–	–	
230 V		A	6	–	–	–	–	
400 V		A	4	–	–	–	–	
500 V		A	2	–	–	–	–	
DC-13								
24 V		A	3	–	–	–	–	
42 V		A	1,7	–	–	–	–	
60 V		A	1,2	–	–	–	–	
110 V		A	0,8	–	–	–	–	
220 V		A	0,3	–	–	–	–	
Electrical life								
AC-15								
230 V/0,5 A	operations	x 10 ⁶	1,6	–	–	–	–	
230 V/1,0 A	operations	x 10 ⁶	1,0	–	–	–	–	
230 V/3,0 A	operations	x 10 ⁶	0,7	–	–	–	–	
DC-13								
12 V/2,8 A	operations	x 10 ⁶	1,2	–	–	–	–	
Approvals								
Technical data on request.			UL/CSA	UL/CSA	UL/CSA	UL/CSA	UL/CSA	

¹> 200 V AC/60 Hz: -25/+55 °C

Technical Data

			Rotary Switches key operated	Potentiometer Solid Pilot Lights	Pilot Lights	Push Buttons Push Buttons, illuminated Mushroom P/B, latched	Emergency Stop Push Buttons
General							
Standards and requirements			IEC/EN 60947, VDE 0660				
Mechanical life	operations	$\times 10^6$	> 0,1			> 0,1	> 0,1
Max. operating frequency		S/h	100			1800	600
Operating force		N				≤ 5	≤ 50
Operating torque		Nm	$\leq 0,5$				
Protection acc. to IEC/EN 60529			IP 66	IP 66 (Potentiometer) IP 67/IP 69K (pilot light)	IP 67/IP 69K	IP 67/IP 69K	reset by turning IP 67/IP 69K reset by pulling IP 66/IP 69K
Environmental resistance			humidity, constant, acc. to IEC 60068-2-78 humidity, cyclic, acc. to IEC 60068-2-30				
Ambient temperature	open	min./max.	°C	-25/+70	-25/+70	-25/+70	-25/+70
Mounting position				any	any	any	any
Shock withstand acc. to IEC 60068-2-27				> 30	> 30	> 30	> 50
Shock period 11 ms, 1/2 sinus wave							
Max. permissible wire gage							
single core	min.-max.	mm ²		0,5-1,5			
stranded wire	min.-max.	mm ²		0,5-1,5			
Current Paths							
Rated impulse withstand voltage U_{imp}		V		4000			
Rated insulation voltage U_i		V		250			
Overvoltage category/ Pollution degree				III/3			
Approvals							
Technical data on request.			UL/CSA	UL/CSA	UL/CSA	UL/CSA	UL/CSA

Foot and Palm Switches latched

General							
Standards and requirements			IEC/EN 60947, VDE 0660				
Mechanical life	operations	$\times 10^6$	> 0,1				
Max. operating frequency		S/h	≤ 600				
Operating force		N	≤ 60				
Protection acc. to IEC/EN 60529			IP 67, IP 69K				
Environmental resistance			humidity, constant, acc. to IEC 60068-2-78 humidity, cyclic, acc. to IEC 60068-2-30				
Ambient temperature	min./max.	°C	-25/+40				
Mounting position			any				
Shock withstand acc. to IEC 60068-2-27							
Shock period 11 ms, 1/2 sinus wave							

Cam Switches CG4¹

General							
Standards and requirements			IEC/EN 60947, VDE 0660				
Rated impulse withstand voltage U_e ²		V	440				
Rated insulation voltage U_{imp} ²		V	4000				
Rated thermal current I_U/I_{th}		A	10				
Rated operational current I_e	AC-21A	A	10				
220 V-240 V	AC-15	A	2,5				
380 V-440 V	AC-15	A	1,5				
Max. fuse size gL/gG-characteristic		A	10				
Max. permissible wire gage							
single core or stranded wire		mm ²	2 x 1,5				
flexible wire		mm ²	2 x 1,5				
Approvals							
Technical data on request.			UL/CSA/GOST/CCC ³				

¹For further cam switches, refer to Catalog 120. ²Valid for lines with grounded common neutral termination, overvoltage category III, pollution degree 3.

³If this approval is required, please request when ordering.