

MINIATURE PILOT LIGHTS

小型指示燈

AP Ø8, 10, 12, 16



Built-in protection diode and current limiting resistor.

內具保護二極體及限流電阻

- 8, 10, 12 and 16mm diameter; dome or flat lens
- 6, 12, 24V DC; Red, green, amber, yellow and white
- 安裝孔徑: 8, 10, 12, 16mm 圓突形或平面形照光面
- 6, 12, 24V DC: 紅、綠、琥珀、黃、及白色



Micro Command Control Lights


小型照光式押扣開關、指示燈

MCM

LED or incandescent illumination in full to 4-way division.

LED 或白熱燈泡式照光 (最多可分隔為 4 部份)

- Illumination face: 18.8 X 26.7, 18.8 X 18.8, Ø24.5; 6 colors
- Contact: 1 to 3 poles; 5A 250V AC, 125V DC
- 照光面: 18.8 X 26.7, 18.8 X 18.8, Ø24.5; 6 種顏色
- 接點定格: 5A 250V AC, 125V DC (1~3P)

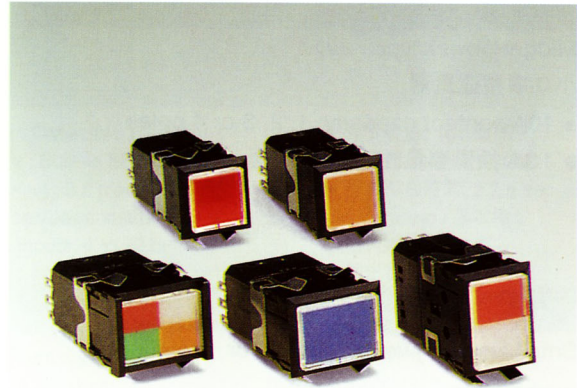

Combination Display Lights

組合式指示燈


SLC30 / 40



Up to 200 windows can be combined together.

組合燈數可多達 200 個

- Illumination face: 30 X 30 to 40 X 120 (9 types)
- LED or incandescent illumination in 6 colors
- 照光面: 30 X 30 ~ 40 X 120 (9 種)
- LED 或白熱燈泡式照光, 共分 6 種顏色

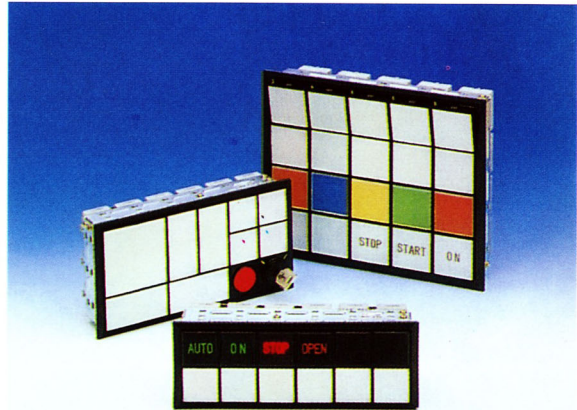

SLD

DIN standard size frames with up to 3-way division.

DIN 標準尺寸框架, 最多可分隔至 3 部份

- Frame size: 36 X 36 to 48 X 96 (7 types)
- LED or incandescent illumination in 6 colors
- 框架尺寸: 36 X 36 ~ 48 X 96 (7 種)
- LED 或白熱燈泡式照光, 共分 6 種顏色

