

SWITCHING POWER SUPPLIES

交換式電源供應器

PS5R




DIN rail or panel mount
 Universal AC input (85 to 264V AC)
 DC compatible input (105 to 370V DC)

- Time-saving spring-up terminals
- Five output capacities: 7.5, 15, 30, 50, 100W
- UL 508 listing

DIN 固定軌或底板式安裝
 適合全球 AC 電壓輸入(85 - 264V AC)
 相容 DC 輸入(105 - 370V DC)

- 省時快速安裝彈弓接線端子
- 5 種輸出功率: 7.5, 15, 30, 50, 100W
- UL 508 安全規格

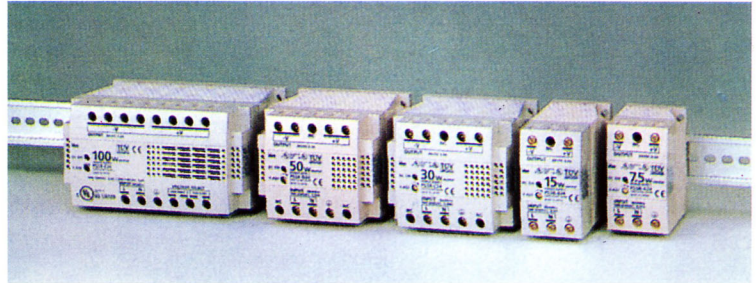


PS3N

Lightweight, open-frame design

- Single output: 5, 12, 24V
- AC/DC compatible input:
 85 to 132V AC/105 to
 170V DC (100V type)

輕巧開放式機座型

- 單電壓輸出: 5, 12, 24V
- 相容 AC/DC 輸入 85-132V AC
 105-170V DC (100V)

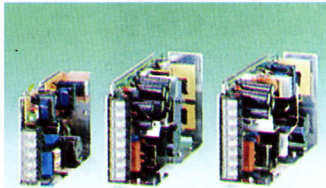

PS3E




Universal AC Input Voltage (85 - 264V AC, 105 - 370V DC)

- Single output: 12, 24V
- Six output capacities:
 10, 15, 30, 50, 100, 150W

適合全球電壓輸入
 (85 - 264V AC, 105 - 370V DC)

- 單電壓輸出: 12, 24V
- 6 種輸出功率: 10, 15, 30, 50,
 100, 150W

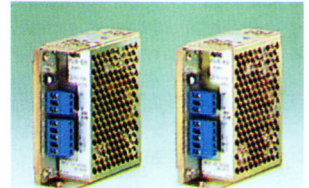

TIMERS

電子計時器

GT3/GT5Y/GT5P



- Time Range: 0.01 sec to 180 hours
- Repeat error: $\pm 0.2\%$
- Multiple operation modes, time ranges
 and wide range of AC power voltage
- 計時範圍: 0.01 秒 ~ 180 小時
- 重覆使用準確度: $\pm 0.2\%$
- 多重操作模式, 計時範圍及 AC 電源
 多用途



GE1A

- Large clear knob for easy time range setting.
- 4 different time ranges to cover a wide time range.
- Highly precise time control.
- Instant monitoring of operation status by indicators.

- 大而清晰旋鈕方便置定時間
- 4 種不同定時時段使定時範圍
 更闊
- 高準確度定時控制
- 有即時監察操作狀態的指示燈

